



3

YEARS
WARRANTYROHS
COMPLIANTREACH
COMPLIANT

Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway

1600
VDC
Isolation
Voltage4 : 1
Wide
Input
Range2 : 1
Input
Range6
sided
ShieldingNO
Min. Load
RequiredREMOTE
ON
OFF

OCP

OVP

SCP

PART NUMBER STRUCTURE

FDC10 -	48	S	05	W -	M2	P	HC
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range	Operating Temp. Options	Remote On/Off Options	Assembly Options
	12:9~18 24:18~36 48:36~75	S:Single	33:3.3 05:5 12:12 15:15	□:2:1	□:-25~+85°C With derating M1:-40~+85°C Without derating M2:-40~+85°C With derating M3:-55~+85°C With derating	□:No pin P:Positive logic N:Negative logic	□:None HC: Heat-sink with Clamp
		D:Dual	05:±5 12:±12 15:±15				
	24:9~36 48:18~75	S:Single	33:3.3 05:5 12:12 15:15	W:4:1	□:-25~+85°C With derating M2:-40~+85°C With derating M3:-55~+85°C With derating	□:No pin P:Positive logic N:Negative logic	□:None HC:Heat-sink with Clamp
		D:Dual	05:±5 12:±12 15:±15				

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @ Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load ⁽¹⁾
	VDC	VDC	mA	mA	%	μF
FDC10-12S33	9 ~ 18	3.3	2000	17	80	6800
FDC10-12S05	9 ~ 18	5	2000	21	81	4700
FDC10-12S12	9 ~ 18	12	830	38	84	690
FDC10-12S15	9 ~ 18	15	670	36	84	470
FDC10-12D05	9 ~ 18	±5	±1000	39	84	±680
FDC10-12D12	9 ~ 18	±12	±416	47	83	±330
FDC10-12D15	9 ~ 18	±15	±333	45	84	±110
FDC10-24S33	18 ~ 36	3.3	2000	15	80	6800
FDC10-24S05	18 ~ 36	5	2000	22	82	4700
FDC10-24S12	18 ~ 36	12	830	18	84	690
FDC10-24S15	18 ~ 36	15	670	36	84	470
FDC10-24D05	18 ~ 36	±5	±1000	28	83	±680
FDC10-24D12	18 ~ 36	±12	±416	24	85	±330
FDC10-24D15	18 ~ 36	±15	±333	31	84	±110
FDC10-48S33	36 ~ 75	3.3	2000	11	80	6800
FDC10-48S05	36 ~ 75	5	2000	14	84	4700
FDC10-48S12	36 ~ 75	12	830	14	86	690
FDC10-48S15	36 ~ 75	15	670	10	87	470
FDC10-48D05	36 ~ 75	±5	±1000	16	84	±680
FDC10-48D12	36 ~ 75	±12	±416	19	86	±330
FDC10-48D15	36 ~ 75	±15	±333	16	85	±110
FDC10-24S33W	9 ~ 36	3.3	2500	13	78	6800
FDC10-24S05W	9 ~ 36	5	2000	11	80	4700
FDC10-24S12W	9 ~ 36	12	830	16	84	690
FDC10-24S15W	9 ~ 36	15	670	26	81	470
FDC10-24D05W	9 ~ 36	±5	±1000	15	82	±680
FDC10-24D12W	9 ~ 36	±12	±416	15	80	±330
FDC10-24D15W	9 ~ 36	±15	±333	22	80	±110
FDC10-48S33W	18 ~ 75	3.3	2500	10	76	6800
FDC10-48S05W	18 ~ 75	5	2000	9	81	4700
FDC10-48S12W	18 ~ 75	12	830	9	84	690
FDC10-48S15W	18 ~ 75	15	670	11	84	470
FDC10-48D05W	18 ~ 75	±5	±1000	12	82	±680
FDC10-48D12W	18 ~ 75	±12	±416	20	78	±330
FDC10-48D15W	18 ~ 75	±15	±333	20	81	±110

INPUT SPECIFICATIONS							
Parameter	Conditions			Min.	Typ.	Max.	Unit
Operating input voltage range	FDC10 series	12Vin(nom)		9	12	18	VDC
		24Vin(nom)		18	24	36	
		48Vin(nom)		36	48	75	
	FDC10W series	24Vin(nom)		9	24	36	VDC
		48Vin(nom)		18	48	75	
Start up time	Constant resistive load	Power up		20			ms
Input surge voltage	100 ms, max.	12Vin(nom)				36	VDC
		24Vin(nom)				50	
		48Vin(nom)				100	
Input filter				Pi type			
Remote ON/OFF (Option)	Referred to –Vin pin	Positive logic	DC-DC ON	Open or 3.5 ~ 12VDC			mA
			DC-DC OFF	Short or 0 ~ 1.2VDC			
		Negative logic	DC-DC ON	Short or 0 ~ 1.2VDC			
			DC-DC OFF	Open or 3.5 ~ 12VDC			
			Input current of Ctrl pin	-0.5	+1.0		
			Remote off input current		20		

OUTPUT SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Voltage accuracy			-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load		-0.2		+0.2	%
Load regulation	No Load to Full Load	Single	-0.5		+0.5	%
		Dual	-1.0		+1.0	
Cross regulation	Asymmetrical load 25%/100% FL	Dual	-5.0		+5.0	%
Ripple and noise	Measured by 20MHz bandwidth	Single		50		mVp-p
		Dual		75		
Temperature coefficient			-0.02		+0.02	%/°C
Transient response recovery time	25% load step change			250		µs
Over voltage protection	Zener diode clamp	3.3Vout		3.9		VDC
		5Vout		6.2		
		12Vout		15		
		15Vout		18		
Over load protection	% of Iout rated				150	%
Short circuit protection			Continuous, automatic recovery			

GENERAL SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Input to Output	1600			VDC
		Input (Output) to Case	1600			
Isolation resistance	500VDC		1			GΩ
Isolation capacitance					300	pF
Switching frequency			270	300	330	kHz
Safety approvals	IEC/ EN/ UL62368-1				UL:E193009 CB: UL(Demko)	
Case material					Nickel-coated copper	
Base material					Non-conductive black plastic	
Potting material					Epoxy (UL94 V-0)	
Weight					27g (0.95oz)	
MTBF	MIL-HDBK-217F, Full load				3.342 x 10 ⁵ hrs	

ENVIRONMENTAL SPECIFICATIONS





ENVIRONMENTAL OPERATING PARAMETERS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating ambient temperature	Standard	With derating	-25		+85	°C
	M1	Without derating	-40		+85	
	M2	With derating	-40		+85	
	M3	With derating	-55		+85	
*M1 version is more efficient; therefore, it can be operated in a more extensive temperature range than standard and M2 version.						
Maximum case temperature					105	°C
Storage temperature range			-55		+125	°C
Thermal impedance	Natural convection	Without heat-sink		12		°C/W
		With heat-sink		10		
Thermal shock					MIL-STD-810F	
Vibration					MIL-STD-810F	
Relative humidity					5% to 95% RH	

EMC SPECIFICATIONS

Parameter	Conditions		Level
EMI	EN55032	With external components	Class A, Class B
EMS	EN55024		
ESD	EN61000-4-2	Air ± 8 kV and Contact ± 6 kV	Perf. Criteria B
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4	± 2 kV	Perf. Criteria B
Surge	EN61000-4-5	With an external input filter capacitor (Nippon chemi-con KY series, 220 μ F/100V)	Perf. Criteria B
		± 2 kV	
Conducted immunity	EN61000-4-6	With an external input filter capacitor (Nippon chemi-con KY series, 220 μ F/100V)	Perf. Criteria A
		10 Vr.m.s	
Power frequency magnetic field	EN61000-4-8	100A/m continuous; 1000A/m 1 second	Perf. Criteria A

CAUTION: This power module is not internally fused. An input line fuse must always be used.

CHARACTERISTIC CURVE

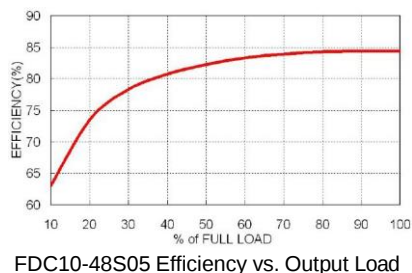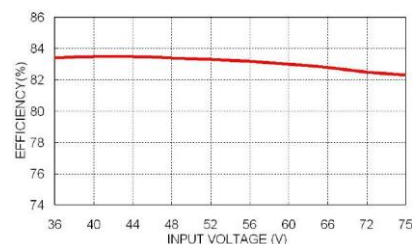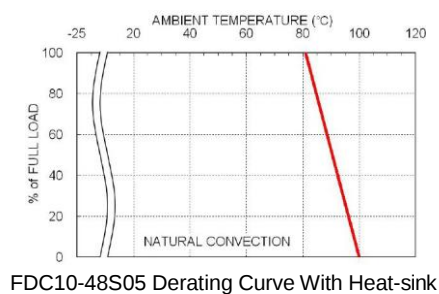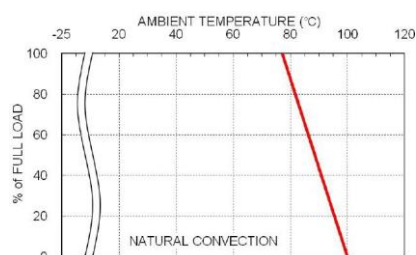

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.


The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
FDC10-12S□□, FDC10-12D□□	2	Slow-Blow
FDC10-24S□□, FDC10-24D□□	1	Slow-Blow
FDC10-48S□□, FDC10-48D□□	0.5	Slow-Blow

Model	Fuse Rating (A)	Fuse Type
FDC10-24S□□W, FDC10-24D□□W	2	Slow-Blow
FDC10-48S□□W, FDC10-48D□□W	1	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

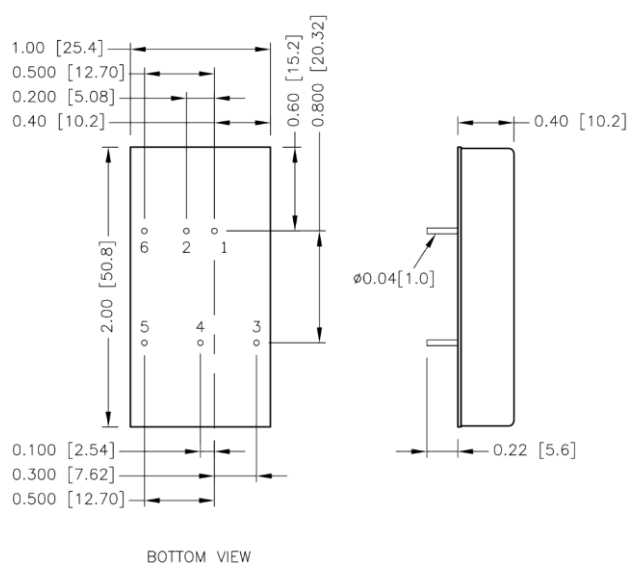


PIN CONNECTION

PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	No pin	Common
5	-Vout	-Vout
6	Ctrl(Optional)	Ctrl(Optional)

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Pin dimension tolerance ±0.004[0.10]

HEAT-SINK OPTIONS


-HC (Heat-sink with clamps)

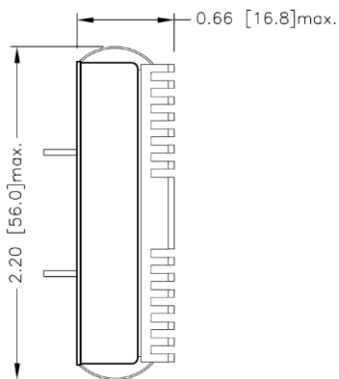


* All dimensions in inch [mm]

RECOMMENDED PAD LAYOUT

Standard

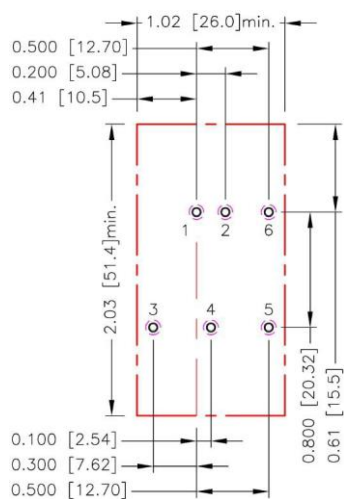

-HC

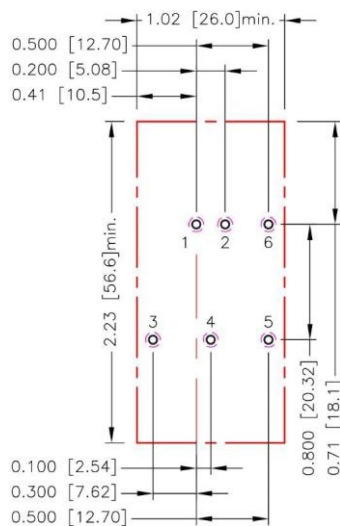

All dimensions in inch[mm]
Pad size(lead free recommended)
Through hole 1.2.3.4.5.6: $\varnothing 0.051$ [1.30]
Top view pad 1.2.3.4.5.6: $\varnothing 0.064$ [1.63]
Bottom view pad 1.2.3.4.5.6: $\varnothing 0.102$ [2.60]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments.

However, sufficient cooling should be provided to help ensure reliable operation of the unit.

Heat is removed by conduction, convection, and radiation to the surrounding Environment.


Proper cooling can be verified by measuring the point as the figure below.

The temperature at this location should not exceed "Maximum case temperature".

When Operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature".

You can limit this Temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).

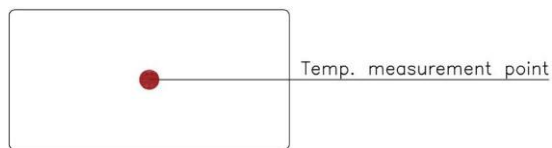

TOP VIEW