



3

YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway



1600
VDC
Isolation
Voltage

2 : 1
Input
Range

6
sided
Shielding

LOW
Standby
Power

NO
Min. Load
Required

REMOTE
ON
OFF

OCP

OTP

OVP

SCP

UVP

PART NUMBER STRUCTURE

FED40 -	48	S	05	-	M3	N	HC
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)		Operating Temp. Options	Remote Control Options	Assembly Options
	12:9~18 24:18~36 48:36~75	S:Single D:Dual	3P3:3.3 05:5 12:12 15:15 24:24 12:±12 15:±15 24:±24		□: Standard -40~+105°C With derating M3: M3 Version -55~+105°C With derating	□: Positive logic N: Negative logic	□: None HC: 7G-0020C-F; H=0.22" (※NRND) HC1: 7GA0120P01-F; H=0.3" HC2: 7GA0121P01-F; H=0.5" HC3: 7GA0122P01-F; H=0.8"

※NRND: Not recommended for new designs

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	μF
FED40-12S3P3	9 ~ 18	3.3	10000	20	90	26600
FED40-12S05	9 ~ 18	5	8000	20	91	20000
FED40-12S12	9 ~ 18	12	3333	20	91	3900
FED40-12S15	9 ~ 18	15	2666	20	91	2600
FED40-12S24	9 ~ 18	24	1666	20	91	1300
FED40-12D12	9 ~ 18	±12	±1666	20	90	± 2600
FED40-12D15	9 ~ 18	±15	±1333	20	91	± 1600
FED40-12D24	9 ~ 18	±24	±833	20	91	±650
FED40-24S3P3	18 ~ 36	3.3	10000	15	91	26600
FED40-24S05	18 ~ 36	5	8000	15	92	20000
FED40-24S12	18 ~ 36	12	3333	15	92	3900
FED40-24S15	18 ~ 36	15	2666	15	92	2600
FED40-24S24	18 ~ 36	24	1666	15	91	1300
FED40-24D12	18 ~ 36	±12	±1666	15	90	± 2600
FED40-24D15	18 ~ 36	±15	±1333	15	91	± 1600
FED40-24D24	18 ~ 36	±24	±833	15	91	±650
FED40-48S3P3	36 ~ 75	3.3	10000	10	91	26600
FED40-48S05	36 ~ 75	5	8000	10	92	20000
FED40-48S12	36 ~ 75	12	3333	10	92	3900
FED40-48S15	36 ~ 75	15	2666	10	92	2600
FED40-48S24	36 ~ 75	24	1666	10	92	1300
FED40-48D12	36 ~ 75	±12	±1666	10	91	± 2600
FED40-48D15	36 ~ 75	±15	±1333	10	91	± 1600
FED40-48D24	36 ~ 75	±24	±833	10	90	±650

INPUT SPECIFICATIONS						
Parameter	Conditions			Min.	Typ.	Max. Unit
Operating input voltage range	12Vin(nom) 24Vin(nom) 48Vin(nom)			9 18 36	12 24 48	18 36 75 VDC
Start up voltage	12Vin(nom) 24Vin(nom) 48Vin(nom)					9 18 36 VDC
Shutdown voltage	12Vin(nom) 24Vin(nom) 48Vin(nom)			7 15 32	8 16 33.5	8.8 17.5 35 VDC
Start up time	Constant resistive load	Power up Remote ON/OFF			60 60	ms
Input surge voltage	1 second, max.	12Vin(nom) 24Vin(nom) 48Vin(nom)				25 50 100 VDC
Input filter				Pi type		
Remote ON/OFF	Referred to –Vin pin	Positive logic DC-DC ON (Standard) DC-DC OFF Negative logic DC-DC ON (Option) DC-DC OFF Input current of Ctrl pin Remote off input current		-0.5	3	0.5 mA mA

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy		-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load	-0.2		+0.2	%
Load regulation	No Load to Full Load	-0.5		+0.5	%
	Single	-1.0		+1.0	%
	Dual				
Cross regulation	Asymmetrical load 25%/100% FL	-5.0		+5.0	%
Voltage adjustability	Single output	-10		+10	%
	3.3Vout, 5Vout, 12Vout	-10		+20	%
	15Vout, 24Vout				
Ripple and noise	Measured by 20MHz bandwidth With a 0.1μF/50V X7R MLCC		75 100 150	100 125 200	mVp-p
	3.3Vout, 5Vout 12Vout, 15Vout 24Vout				
Temperature coefficient		-0.02		+0.02	%/°C
Transient response recovery time	25% load step change		250		μs
Over voltage protection	Zener diode clamp		3.9 6.2 15 20 30		VDC
	3.3Vout 5Vout 12Vout 15Vout 24Vout				
Over load protection	% of Iout rated; Hiccup mode		150		%
Short circuit protection					Continuous, automatic recovery

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	1600			VDC
	Input to Output Input (Output) to Case	1600			
Isolation resistance	500VDC	1			GΩ
Isolation capacitance				1500	pF
Switching frequency		225	250	275	kHz
Safety approvals	IEC/ EN/ UL62368-1			UL:E193009 CB:UL(Demko)	
Case material					Copper
Base material					FR4 PCB
Potting material					Silicone (UL94 V-0)
Weight					32g (1.13oz)
MTBF	MIL-HDBK-217F, Full load.				1.066 x 10 ⁵ hrs


ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	Standard	-40		+105	°C
	M3 Version	-55		+105	°C
Maximum case temperature				105	°C
Over temperature protection			115		°C
Storage temperature range		-55		+125	°C
Thermal impedance	Without Heat-sink		10.8		
	With Heat-sink		10.3		
	HC				
	HC1		9.3		°C/W
	HC2		7.7		
	HC3		6.2		
Thermal shock					MIL-STD-810F
Shock					MIL-STD-810F
Vibration					MIL-STD-810F
Relative humidity					5% to 95% RH


EMC SPECIFICATIONS		
Parameter	Conditions	Level
EMI	EN55032 With external components.	Class A , Class B
EMS	EN55024	
ESD	EN61000-4-2 Air $\pm$ 8kV and Contact $\pm$ 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 20 V/m	Perf. Criteria A
Fast transient	EN61000-4-4 $\pm$ 2kV	Perf. Criteria A
	FED40-12□□□ With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220 μ F/100V) and a TVS(SMDJ58A, 58V, 3000Watt peak pulse power) in parallel.	
	FED40-24□□□ With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220 μ F/100V) and a TVS(SMDJ64A, 64V, 3000Watt peak pulse power) in parallel.	
	FED40-48□□□ With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220 μ F/100V) and a TVS (SMDJ120A,120V, 3000Watt peak pulse power) in parallel.	
Surge	EN61000-4-5 $\pm$ 2kV	Perf. Criteria A
	FED40-12□□□ With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220 μ F/100V) and a TVS(SMDJ58A, 58V, 3000Watt peak pulse power) in parallel.	
	FED40-24□□□ With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220 μ F/100V) and a TVS(SMDJ64A, 64V, 3000Watt peak pulse power) in parallel.	
	FED40-48□□□ With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 220 μ F/100V) and a TVS (SMDJ120A,120V, 3000Watt peak pulse power) in parallel.	
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

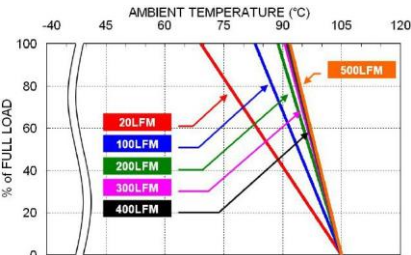


FED40-48S05 Derating Curve

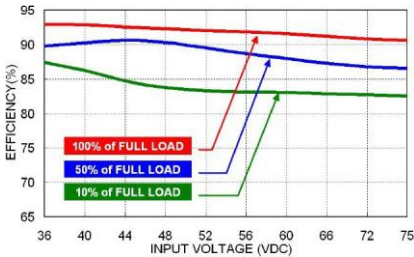

FED40-48S05 Efficiency VS Input Voltage

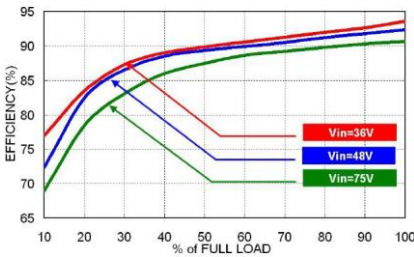

FED40-48S05 Efficiency VS Output Load

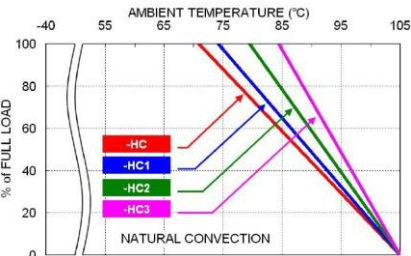

FED40-48S05 Derating Curve With Heat-sink


FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.
This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.
To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.
The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
FED40-12□□□	8	Fast-Acting
FED40-24□□□	4	Slow-Blow
FED40-48□□□	2	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

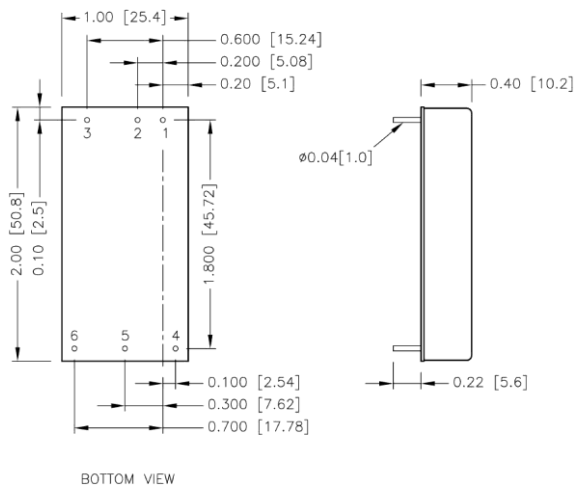


PIN CONNECTION

PIN	SINGLE	DUAL
1	+ Vin	+ Vin
2	- Vin	- Vin
3	Ctrl	Ctrl
4	+ Vout	+ Vout
5	- Vout	Common
6	Trim	- Vout


- All dimensions in inch [mm]
Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.010 [x.xx±0.25]
- Pin dimension tolerance ±0.004[0.10]

RECOMMENDED PAD LAYOUT


Standard

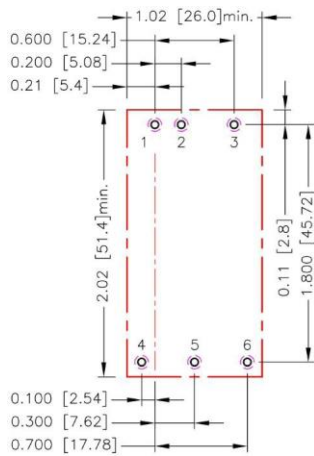

-HC

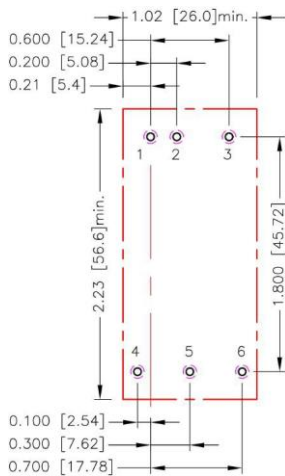

-HC1, -HC2, -HC3

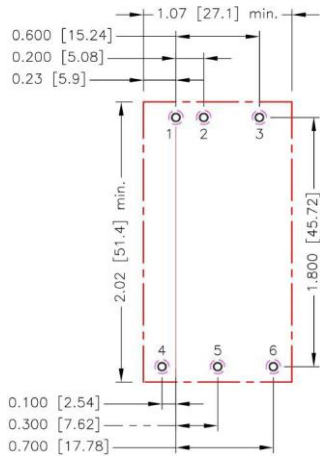


All dimensions in inch[mm]
Pad size(lead free recommended)
Through hole 1.2.3.4.5.6: $\Phi 0.051$ [1.30]
Top view pad 1.2.3.4.5.6: $\Phi 0.064$ [1.63]
Bottom view pad 1.2.3.4.5.6: $\Phi 0.102$ [2.60]

THERMAL CONSIDERATIONS


The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed "Maximum case temperature". When operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).

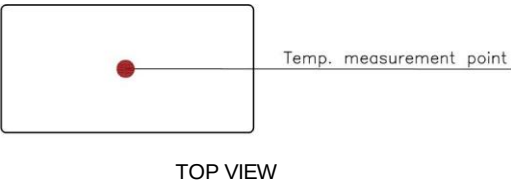


HEAT-SINK TYPE OPTIONS


FED40-□□□□□-HC
7G-0020C-F

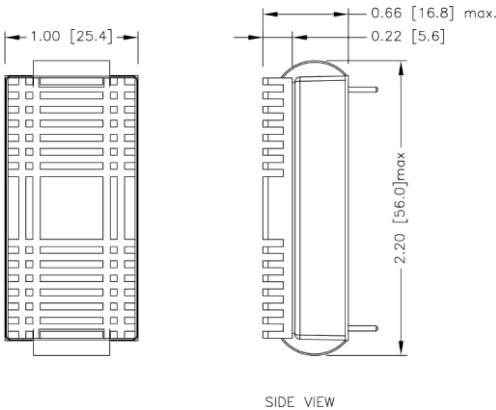


FED40-□□□□□-HC1
7GA0120P01-F

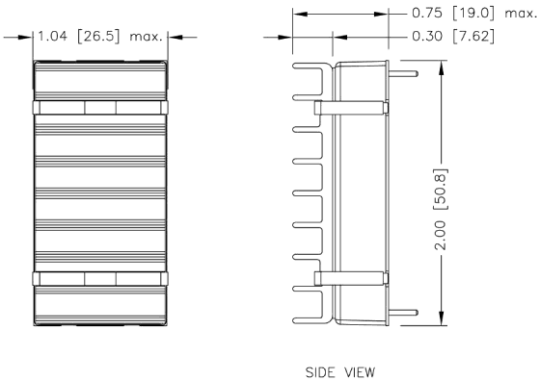

FED40-□□□□□-HC2
7GA0121P01-F

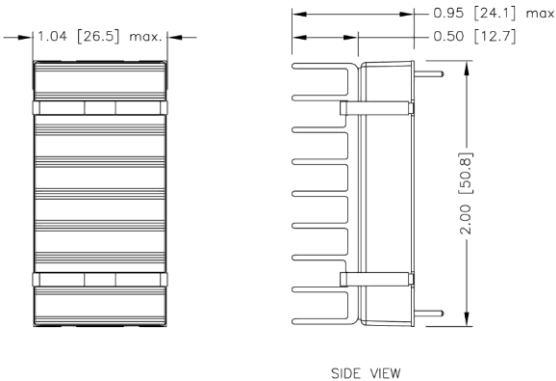

FED40-□□□□□-HC3
7GA0122P01-F

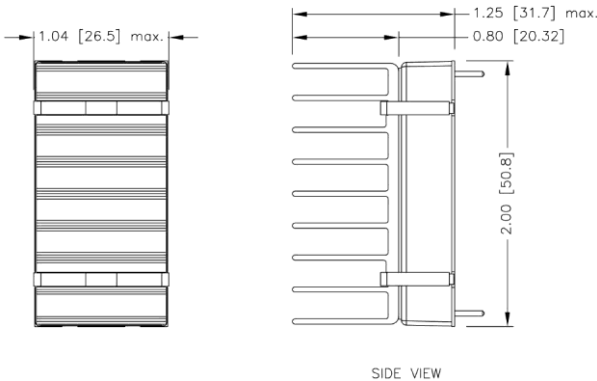

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.010 [x.xx±0.25]


OUTPUT VOLTAGE ADJUSTMENT

Output voltage set point adjustment allows the user to increase or decrease the output voltage set point of the module. This is accomplished by connecting an external resistor between the Trim pin and either the +Output or -Output pins. With an external resistor between the Trim and -Vout, the output voltage set point increases. With an external resistor between the Trim and +Vout, the output voltage set point decreases. The external Trim resistor needs to be at least 1/16W of rated power.

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.

Trim-up



□□S3P3

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.630
RU (kΩ)	57.93	26.165	15.577	10.283	7.106	4.988	3.476	2.341	1.459	0.753

□□S05

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	5.050	5.100	5.150	5.200	5.250	5.300	5.350	5.400	5.450	5.500
RU (kΩ)	36.57	16.58	9.917	6.585	4.586	3.253	2.302	1.588	1.032	0.588

□□S12

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	12.120	12.240	12.360	12.480	12.600	12.720	12.840	12.960	13.080	13.200
RU (kΩ)	367.91	165.95	98.636	64.977	44.782	31.318	21.701	14.488	8.879	4.391

□□S15

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	15.150	15.300	15.450	15.600	15.750	15.900	16.050	16.200	16.350	16.500
RU (kΩ)	419.81	199.91	126.60	89.95	67.96	53.30	42.83	34.98	28.87	23.98

ΔV (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	16.650	16.800	16.950	17.100	17.250	17.400	17.550	17.700	17.850	18.000
RU (kΩ)	19.98	16.65	13.83	11.42	9.32	7.49	5.87	4.43	3.15	1.99


□□S24

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	24.240	24.480	24.720	24.960	25.200	25.440	25.680	25.920	26.160	26.400
RU (kΩ)	1275.2	606.60	383.73	272.30	205.44	160.87	129.03	105.15	86.58	71.72

ΔV (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	26.640	26.880	27.120	27.360	27.600	27.840	28.080	28.320	28.560	28.800
RU (kΩ)	59.56	49.43	40.86	33.51	27.15	21.57	16.66	12.29	8.38	4.86

OUTPUT VOLTAGE ADJUSTMENT(CONTINUED)

Trim-down



□□S3P3

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.970
RD (kΩ)	69.47	31.235	18.49	12.117	8.294	5.745	3.924	2.559	1.497	0.647

□□S05

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	4.950	4.900	4.850	4.800	4.750	4.700	4.650	4.600	4.550	4.500
RD (kΩ)	45.533	20.612	12.306	8.152	5.66	3.999	2.812	1.922	1.23	0.676

□□S12

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	11.880	11.760	11.640	11.520	11.400	11.280	11.160	11.040	10.920	10.800
RD (kΩ)	460.99	207.95	123.6	81.423	56.118	39.249	27.199	18.162	11.132	5.509

□□S15

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	14.850	14.700	14.550	14.400	14.250	14.100	13.950	13.800	13.650	13.500
RD (kΩ)	284.89	128.68	76.61	50.58	34.96	24.55	17.11	11.53	7.19	3.72

□□S24

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	23.760	23.520	23.280	23.040	22.800	22.560	22.320	22.080	21.840	21.600
RD (kΩ)	838.15	376.78	222.98	146.09	99.95	69.19	47.22	30.74	17.93	7.68