



3

YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway

UL US CB CE UK CA

1600
VDC
Isolation
Voltage

4 : 1
Wide
Input
Range

NO
Min. Load
Required

REMOTE
ON
OFF

OCP

SCP

UVP

PART NUMBER STRUCTURE

FKC12 - 48 S 05 W - SMD

Series Name

Input
Voltage
(VDC)

Output
Quantity

Output
Voltage
(VDC)

Input
Range

Mounting Type
Options

24:9~36
48:18~75

S:Single

3P3:3.3
05:5.1
12:12
15:15

4 : 1

□: DIP type
SMD: SMD type

D:Dual

05:±5
12:±12
15:±15

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	μF
FKC12-24S3P3W	9 ~ 36	3.3	3500	55	84	2000
FKC12-24S05W	9 ~ 36	5.1	2400	55	87	2000
FKC12-24S12W	9 ~ 36	12	1000	13	87	430
FKC12-24S15W	9 ~ 36	15	800	11	87	300
FKC12-24D05W	9 ~ 36	±5	±1200	15	84	±1250
FKC12-24D12W	9 ~ 36	±12	±500	12	87	±200
FKC12-24D15W	9 ~ 36	±15	±400	20	87	±120
FKC12-48S3P3W	18 ~ 75	3.3	3500	17	84	2000
FKC12-48S05W	18 ~ 75	5.1	2400	20	87	2000
FKC12-48S12W	18 ~ 75	12	1000	6	87	430
FKC12-48S15W	18 ~ 75	15	800	6	88	300
FKC12-48D05W	18 ~ 75	±5	±1200	7	85	±1250
FKC12-48D12W	18 ~ 75	±12	±500	7	87	±200
FKC12-48D15W	18 ~ 75	±15	±400	7	87	±120

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	24Vin(nom) 48Vin(nom)	9 18	24 48	36 75	VDC
Start up voltage	24Vin(nom) 48Vin(nom)			9 18	VDC
Shutdown voltage	24Vin(nom) 48Vin(nom)	7 15	8 16	8.8 17.5	VDC
Start up time	Constant resistive load Power up Remote ON/OFF		450 5		ms
Input surge voltage	100 ms, max. 24Vin(nom) 48Vin(nom)			50 100	VDC
Input filter				Pi type	
Remote ON/OFF	Referred to –Vin pin Positive logic DC-DC ON DC-DC OFF Input current of Ctrl pin Remote off input current	-0.5		Open or 3.0 ~ 12VDC Short or 0 ~ 1.2VDC +0.5	mA mA
			2.5		

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy		-1.2		+1.2	%
Line regulation	Low Line to High Line at Full Load	-0.2		+0.2	%
Load regulation	No Load to Full Load DIP type Single Dual SMD type Single Dual	-0.5 -1.0 -1.0 -1.0		+0.5 +1.0 +1.0 +1.0	%
Cross regulation	Asymmetrical load 25%/100% FL Dual	-5.0		+5.0	%
Ripple and noise	20MHz bandwidth		85		mVp-p
Temperature coefficient		-0.02		+0.02	%/°C
Transient response recovery time	25% load step change		250		μs
Over voltage protection			3.3Vout 5.1Vout 12Vout 15Vout	3.9 6.2 15 18	VDC
Over load protection	% of Iout rated		150		%
Short circuit protection				Continuous, automatics recovery	

GENERAL SPECIFICATIONS

Parameter	Conditions			Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	DIP type	Input to Output	1600			VDC
		SMD type	Input (Output) to Case	1600			
			Input to Output	1600			
			Input (Output) to Case	1000			
Isolation resistance	500VDC			1			GΩ
Isolation capacitance						1500	pF
Switching frequency				360	400	440	kHz
Safety approvals	IEC/ EN/ UL62368-1			UL:E193009 CB:UL(Demko)			
Case material				Nickel-coated copper			
Base material				Non-conductive black plastic			
Potting material				Epoxy (UL94 V-0)			
Weight				18g (0.62oz)			
MTBF	MIL-HDBK-217F			2.087 x 10 ⁶ hrs			

ENVIRONMENTAL SPECIFICATIONS




Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating ambient temperature	3.3Vout, ±5Vout	Without derating	-40		+61	℃
		With derating	+61		+105	
	Others	Without derating	-40		+69	
		With derating	+69		+105	
Maximum case temperature					105	℃
Storage temperature range			-55		+125	℃
Thermal impedance				20		℃/W
Thermal shock					MIL-STD-810F	
Vibration					MIL-STD-810F	
Relative humidity					5% to 95% RH	

EMC SPECIFICATIONS

Parameter	Conditions		Level
EMI	EN55032	With external components	Class A, Class B
EMS	EN55024		
ESD	EN61000-4-2	Air ± 8kV and Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4	± 2kV With an external input filter capacitor (Nippon chemi-con KY series, 220μF/100V.)	Perf. Criteria A
Surge	EN61000-4-5	± 1kV With an external input filter capacitor (Nippon chemi-con KY series, 220μF/100V.)	Perf. Criteria A
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8	100A/m continuous; 1000A/m 1 second	Perf. Criteria A

CAUTION: This power module is not internally fused. An input line fuse must always be used

CHARACTERISTIC CURVE

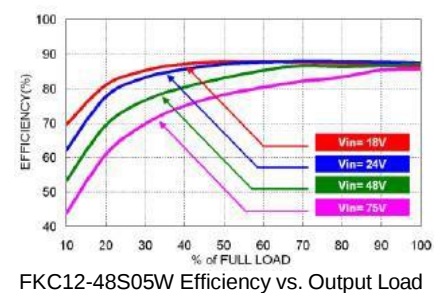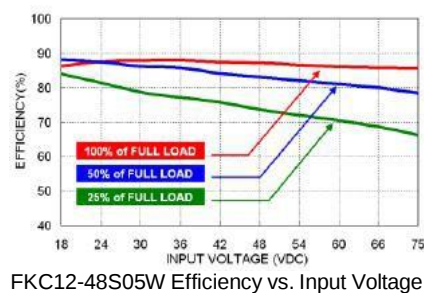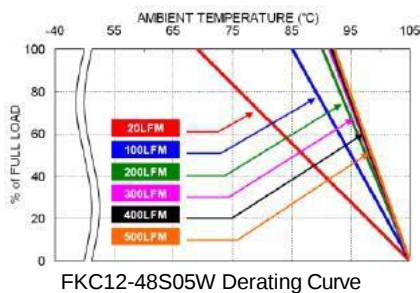

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.


The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
FKC12-24S□□W, FKC12-24D□□W	2.5	Slow-Blow
FKC12-48S□□W, FKC12-48D□□W	1.25	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING


DIP type

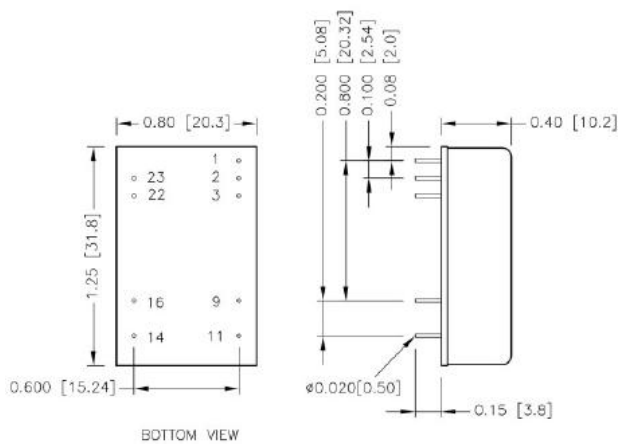

PIN CONNECTION

PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
1	Ctrl	Ctrl	23	+Vin	+Vin
2	-Vin	-Vin	22	+Vin	+Vin
3	-Vin	-Vin			
9	NC	Common	16	-Vout	Common
11	NC	-Vout	14	+Vout	+Vout

SMD type

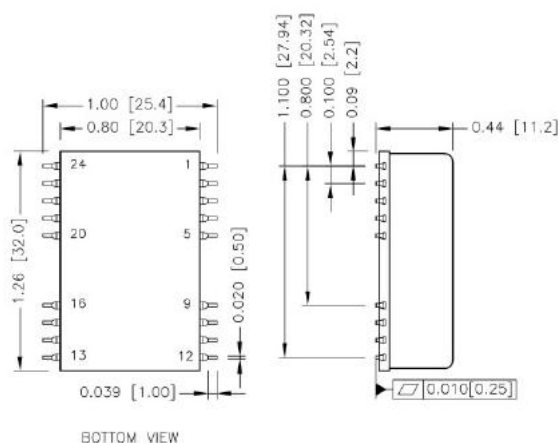


PIN CONNECTION

PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
1	Ctrl	Ctrl			
2	-Vin	-Vin	23	+Vin	+Vin
3	-Vin	-Vin	22	+Vin	+Vin
9	NC	Common	16	-Vout	Common
11	NC	-Vout	14	+Vout	+Vout
Others	NC	NC			

1. All dimensions in inch [mm]
2. Tolerance : x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Pin dimension tolerance ±0.004[0.10]


RECOMMENDED PAD LAYOUT

DIP type



All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3.9.11.14.16.22.23: $\Phi 0.031$ [0.80]
 Top view pad 1.2.3.9.11.14.16.22.23: $\Phi 0.039$ [1.00]
 Bottom view pad 1.2.3.9.11.14.16.22.23: $\Phi 0.063$ [1.60]

SMD type

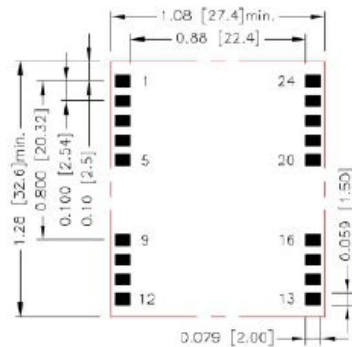

All dimensions in inch[mm]
 Pad size(lead free recommended)
 Top view pad: 0.079x0.059 [2.00x1.50]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments


However, sufficient cooling should be provided to help ensure reliable operation of the unit.

Heat is removed by conduction, convection, and radiation to the surrounding environment. Proper cooling can be verified by measuring the point as the figure below.

The temperature at this location should not exceed "Maximum case temperature".


When operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).

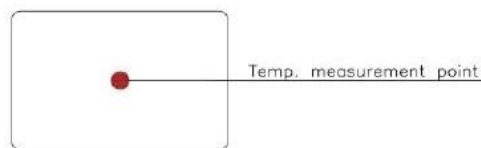

TOP VIEW

LEAD FREE REFLOW PROFILE For SMD Type

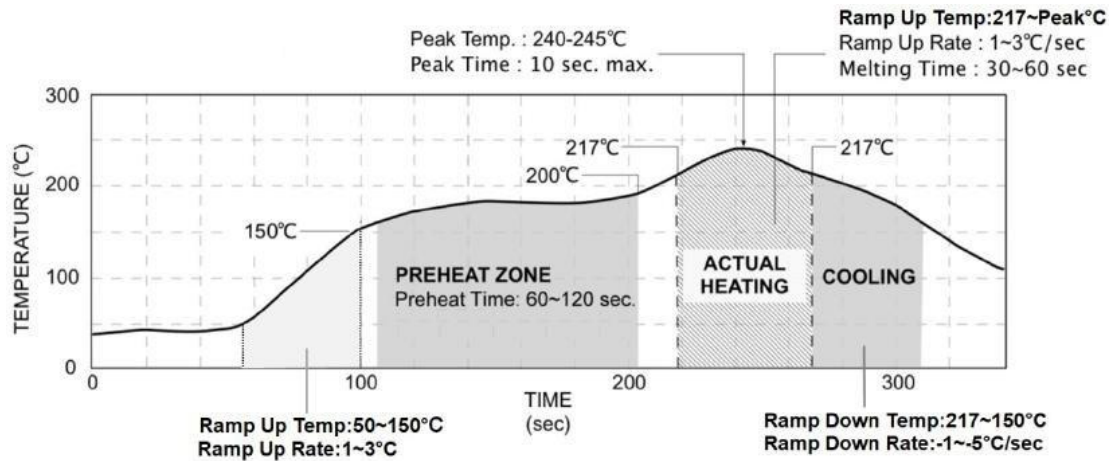

*The curves define the maximum peak reflow temperature permissible measured on pin1 or Vin pin.