



Power Mate Technology, Inc

MPS04 · MPH04 Series

DC-DC Converter
Up to 3.5 Watts

5
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT



Medical



PV



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Railway



2
x
MOPP

5000
VAC
Reinforced
Insulation

2 : 1
Input
Range

LOW
Leakage
Current

Operating
Altitude
5000
meter

REMOTE
ON
OFF

OVP

SCP

UVP

PART NUMBER STRUCTURE

MPS04 -

Series Name

48

Input
Voltage
(VDC)

S

Output
Quantity

05

Output
Voltage
(VDC)

MPS04: SMD type
MPH04: DIP type

05: 4.5~12
12: 9~18
24: 18~36
48: 36~75

S: Single

D: Dual

05: 5
09: 9
12: 12
15: 15
24: 24
12: ±12
15: ±15

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @ Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	μF
MPS(H)04-05S05	4.5 ~ 12	5	700	70	77	1470
MPS(H)04-05S09	4.5 ~ 12	9	389	70	78	680
MPS(H)04-05S12	4.5 ~ 12	12	292	70	82	470
MPS(H)04-05S15	4.5 ~ 12	15	234	90	82	330
MPS(H)04-05S24	4.5 ~ 12	24	146	90	82	170
MPS(H)04-05D12	4.5 ~ 12	±12	±146	90	82	±220
MPS(H)04-05D15	4.5 ~ 12	±15	±117	95	81	±160
MPS(H)04-12S05	9 ~ 18	5	700	40	79	1470
MPS(H)04-12S09	9 ~ 18	9	389	40	79	680
MPS(H)04-12S12	9 ~ 18	12	292	45	82	470
MPS(H)04-12S15	9 ~ 18	15	234	45	82	330
MPS(H)04-12S24	9 ~ 18	24	146	50	82	170
MPS(H)04-12D12	9 ~ 18	±12	±146	50	82	±220
MPS(H)04-12D15	9 ~ 18	±15	±117	50	82	±160
MPS(H)04-24S05	18 ~ 36	5	700	25	79	1470
MPS(H)04-24S09	18 ~ 36	9	389	25	80	680
MPS(H)04-24S12	18 ~ 36	12	292	25	83	470
MPS(H)04-24S15	18 ~ 36	15	234	25	83	330
MPS(H)04-24S24	18 ~ 36	24	146	30	82	170
MPS(H)04-24D12	18 ~ 36	±12	±146	30	82	±220
MPS(H)04-24D15	18 ~ 36	±15	±117	30	82	±160
MPS(H)04-48S05	36 ~ 75	5	700	12	79	1470
MPS(H)04-48S09	36 ~ 75	9	389	12	80	680
MPS(H)04-48S12	36 ~ 75	12	292	13	82	470
MPS(H)04-48S15	36 ~ 75	15	234	13	82	330
MPS(H)04-48S24	36 ~ 75	24	146	13	82	170
MPS(H)04-48D12	36 ~ 75	±12	±146	13	82	±220
MPS(H)04-48D15	36 ~ 75	±15	±117	13	82	±160

INPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	5Vin(nom) 12Vin(nom) 24Vin(nom) 48Vin(nom)	4.5 9 18 36	5 12 24 48	12 18 36 75	VDC
Start up voltage	5Vin(nom) 12Vin(nom) 24Vin(nom) 48Vin(nom)			4.5 9 18 36	VDC
Shutdown voltage	5Vin(nom) 12Vin(nom) 24Vin(nom) 48Vin(nom)	2 6 13 29	3 7 15 32	4 8 17 35	VDC
Start up time	Constant resistive load Power up Remote ON/OFF		10	20	ms
Input surge voltage	1 second, max. 5Vin(nom) 12Vin(nom) 24Vin(nom) 48Vin(nom)			15 25 50 100	VDC
Input filter		Capacitor type			
Remote ON/OFF	Referred to -Vin pin and Ctrl pin applied current	DC-DC ON DC-DC OFF Remote off input current	Open or high impedance 2.0 2.5	4.0	mA mA



OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy		-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load	-0.2		+0.2	%
Load regulation	No Load to Full Load	-1.0		+1.0	%
	10% Load to 90% Load	-0.5		+0.5	%
Cross regulation	Asymmetrical load 25%/100% FL	-0.8		+0.8	%
Ripple and noise	Measured by 20MHz bandwidth	-5.0		+5.0	%
	5Vout 9Vout 12Vout 15Vout 24Vout ±12Vout ±15Vout		50 50 50 50 75 75 75		mVp-p
Temperature coefficient		-0.02		+0.02	%/°C
Transient response recovery time	25% load step change		500		µs
Over voltage protection	5Vout 9Vout 12Vout 15Vout 24Vout	6.0 10.0 13.0 16.0 25.0		8.0 14.0 19.0 22.0 35.0	VDC
Short circuit protection		Continuous, automatic recovery			

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute Reinforced insulation for 250 VAC working voltage	5000			VAC
Isolation resistance	500VDC	10			GΩ
Isolation capacitance			16	20	pF
Leakage current	240VAC, 60Hz			2	μA
Switching frequency		100			kHz
Clearance/Creepage		8			mm
Safety approvals	IEC/ EN/ ANSI/AAMI ES 60601-1 IEC/ EN/ UL 62368-1			UL:E360199 UL:E193009 CB:UL(Demko)	
Case material				Non-conductive black plastic	
Base material				Non-conductive black plastic	
Potting material				Silicone (UL94 V-0)	
Weight				7.0g (0.24oz)	
MTBF	MIL-HDBK-217F, Full load			5.041 x 10 ⁶ hrs	


ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40		+105	°C
Maximum case temperature				105	°C
Storage temperature range		-55		+125	°C
Operating altitude				5000	m
Thermal shock				MIL-STD-810F	
Shock				MIL-STD-810F	
Vibration				MIL-STD-810F	
Relative humidity				5% to 95% RH	
Lead-free reflow solder process	Only for SMD type			IPC J-STD-020E	
Moisture sensitivity level(MSL)	Only for SMD type			IPC J-STD-033C Level 2	


EMC SPECIFICATIONS		
Parameter	Conditions	Level
EMI	EN55011, EN55032, EN60601-1-2 and FCC Part 18 / 15 With external components	Class A, Class B
EMS	EN55024 and EN60601-1-2	
ESD	EN61000-4-2 Air $\pm 15\text{kV}$ and Contact $\pm 8\text{kV}$	Perf. Criteria A
Radiated immunity	EN61000-4-3 10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4 $\pm 2\text{kV}$	Perf. Criteria A
	MPS(H)04-05□□□ With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 1000 $\mu\text{F}/25\text{V}$) and a TVS(SMAJ18A, 18V, 400Watt peak pulse power) in parallel.	
	MPS(H)04-12□□□ With an external input filter capacitor (Nippon chemi-con KY series, 470 $\mu\text{F}/50\text{V}$)	
	MPS(H)04-24□□□ With an external input filter capacitor (Nippon chemi-con KY series, 220 $\mu\text{F}/100\text{V}$)	
Surge	EN61000-4-5 $\pm 1\text{kV}$	Perf. Criteria A
	MPS(H)04-05□□□ With an aluminum electrolytic capacitor (Nippon chemi-con KY series, 1000 $\mu\text{F}/25\text{V}$) and a TVS(SMAJ18A, 18V, 400Watt peak pulse power) in parallel.	
	MPS(H)04-12□□□ With an external input filter capacitor (Nippon chemi-con KY series, 470 $\mu\text{F}/50\text{V}$)	
	MPS(H)04-24□□□ With an external input filter capacitor (Nippon chemi-con KY series, 220 $\mu\text{F}/100\text{V}$)	
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

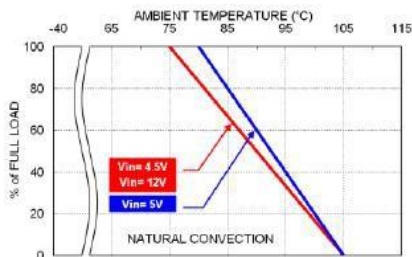


MPS(H)04-05□□□ Derating Curve

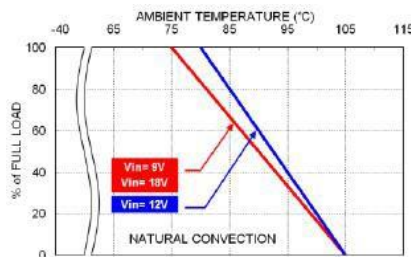


MPS(H)04-12□□□ Derating Curve

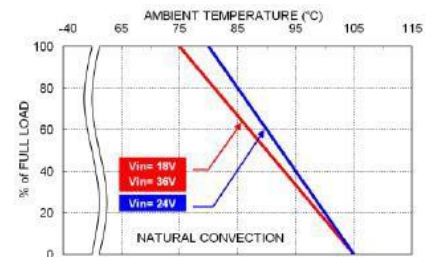


MPS(H)04-24□□□ Derating Curve

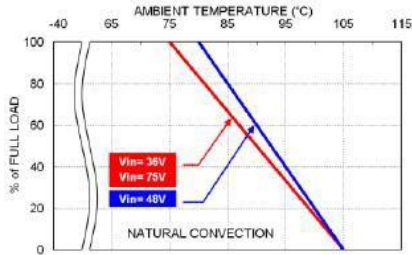

MPS(H)04-48□□□ Derating Curve

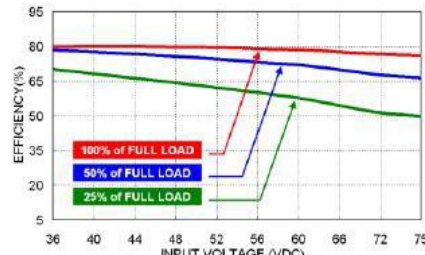

MPS(H)04-48S05 Efficiency vs. Input Voltage

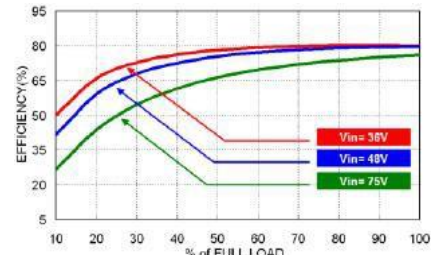

MPS(H)04-48S05 Efficiency vs. Output Current

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.


The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
MPS(H)04-05S□□, MPS(H)04-05D□□	1.6	Slow-Blow
MPS(H)04-12S□□, MPS(H)04-12D□□	0.8	Slow-Blow
MPS(H)04-24S□□, MPS(H)04-24D□□	0.5	Slow-Blow
MPS(H)04-48S□□, MPS(H)04-48D□□	0.315	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

MPH04

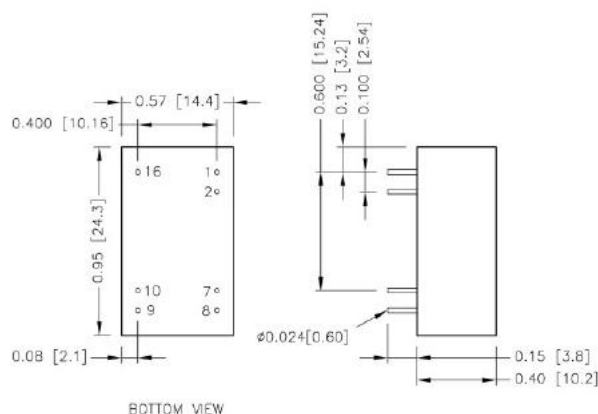


PIN CONNECTION

PIN	SINGLE	DUAL
1	-Vin	-Vin
2	Ctrl	Ctrl
7	NC	NC
8	NC	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin


1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.010 [x.xx±0.25]
3. Pin pitch tolerance ±0.010 [0.25]
4. Pin dimension tolerance ±0.004[0.10]

MPS04

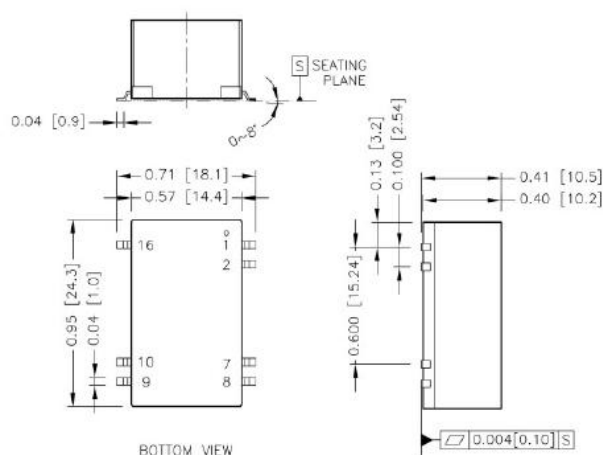


RECOMMENDED PAD LAYOUT

MPH04

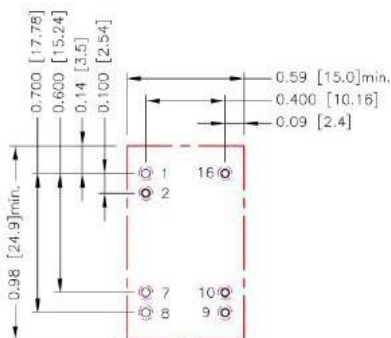

All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.7.8.9.10.16: $\varnothing 0.035$ [0.90]
 Top view pad 1.2.7.8.9.10.16: $\varnothing 0.044$ [1.13]
 Bottom view pad 1.2.7.8.9.10.16: $\varnothing 0.071$ [1.80]

MPS04

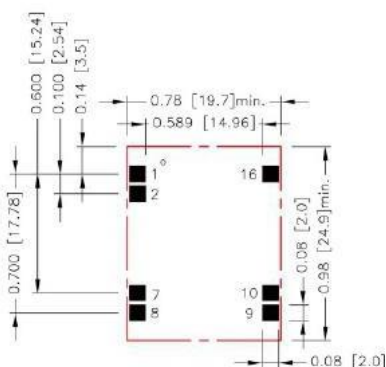


All dimensions in inch[mm]
 Pad size(lead free recommended)
 Top view pad: 0.080x0.080[2.00x2.00]

- * There should be at least 8mm distance between primary and secondary circuit.
- ** For further information, please contact: sales@powermateusa.com

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed "Maximum case temperature". When operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this temperature to a lower value for extremely high reliability.



TOP VIEW