



3

YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway



3000
VDC
Isolation
Voltage

1600
VDC
Isolation
Voltage

2 : 1
Input
Range

TINY
Output
Ripple

NO
Min. Load
Required

REMOTE
ON
OFF

SCP

PART NUMBER STRUCTURE

PDS03 -

48

S

05

H

Series Name

Input
Voltage
(VDC)

Output
Quantity

Output
Voltage
(VDC)

Isolation
Options

PDS: SMD type
PDH: DIP type

05:4.5~9
12:9~18
24:18~36
48:36~75

S:Single

3P3:3.3
05:5
09:9
12:12
15:15

☐:Standard type
1600VDC isolation
H:3000VDC isolation



D:Dual

05:±5
12:±12
15:±15

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @ Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	μF
PDS(H)03-05S3P3	4.5 ~ 9	3.3	700	40	75	3300
PDS(H)03-05S05	4.5 ~ 9	5	600	40	79	1680
PDS(H)03-05S09	4.5 ~ 9	9	333	40	79	1000
PDS(H)03-05S12	4.5 ~ 9	12	250	40	80	820
PDS(H)03-05S15	4.5 ~ 9	15	200	50	81	680
PDS(H)03-05D05	4.5 ~ 9	±5	±300	50	80	±1000
PDS(H)03-05D12	4.5 ~ 9	±12	±125	50	80	±470
PDS(H)03-05D15	4.5 ~ 9	±15	±100	55	81	±330
PDS(H)03-12S3P3	9 ~ 18	3.3	700	30	76	3300
PDS(H)03-12S05	9 ~ 18	5	600	30	81	1680
PDS(H)03-12S09	9 ~ 18	9	333	30	80	1000
PDS(H)03-12S12	9 ~ 18	12	250	30	82	820
PDS(H)03-12S15	9 ~ 18	15	200	30	82	680
PDS(H)03-12D05	9 ~ 18	±5	±300	30	80	±1000
PDS(H)03-12D12	9 ~ 18	±12	±125	30	82	±470
PDS(H)03-12D15	9 ~ 18	±15	±100	30	83	±330
PDS(H)03-24S3P3	18 ~ 36	3.3	700	13	76	3300
PDS(H)03-24S05	18 ~ 36	5	600	13	81	1680
PDS(H)03-24S09	18 ~ 36	9	333	13	82	1000
PDS(H)03-24S12	18 ~ 36	12	250	13	82	820
PDS(H)03-24S15	18 ~ 36	15	200	13	83	680
PDS(H)03-24D05	18 ~ 36	±5	±300	13	80	±1000
PDS(H)03-24D12	18 ~ 36	±12	±125	13	83	±470
PDS(H)03-24D15	18 ~ 36	±15	±100	13	83	±330
PDS(H)03-48S3P3	36 ~ 75	3.3	700	10	76	3300
PDS(H)03-48S05	36 ~ 75	5	600	10	81	1680
PDS(H)03-48S09	36 ~ 75	9	333	10	80	1000
PDS(H)03-48S12	36 ~ 75	12	250	10	82	820
PDS(H)03-48S15	36 ~ 75	15	200	10	82	680
PDS(H)03-48D05	36 ~ 75	±5	±300	10	81	±1000
PDS(H)03-48D12	36 ~ 75	±12	±125	10	83	±470
PDS(H)03-48D15	36 ~ 75	±15	±100	10	83	±330

INPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating input voltage range		05Vin(nom)	4.5	5	9	VDC
		12Vin(nom)	9	12	18	
		24Vin(nom)	18	24	36	
		48Vin(nom)	36	48	75	
Start up time	Constant resistive load	Power up	5			ms
		Remote ON/OFF	5			
Input surge voltage	1 second, max.	05Vin(nom)	15			VDC
		12Vin(nom)	25			
		24Vin(nom)	50			
		48Vin(nom)	100			
Input filter			Capacitor type			
Remote ON/OFF	Ctrl pin applied current via 1kΩ	DC-DC ON	Open or high impedance			
		DC-DC OFF	2	3	4	mA
		Remote off input current	2.5			mA
Application circuit						
DC-DC ON		DC-DC OFF				
						

OUTPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Voltage accuracy			-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load		-0.2		+0.2	%
Load regulation	No Load to Full Load	Single	-1.0		+1.0	%
		Dual	-1.0		+1.0	
	10% Load to 100% Full Load	Single	-0.5		+0.5	
		Dual	-0.8		+0.8	
Cross regulation	Asymmetrical load 25%/100% FL	Dual	-5.0		+5.0	%
Ripple and noise	20MHz bandwidth			30		mVp-p
Temperature coefficient			-0.02		+0.02	%/°C
Transient response recovery time	25% load step change			250		μs
Short circuit protection			Continuous, automatic recovery			

GENERAL SPECIFICATIONS

Parameter	Conditions			Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Input to Output	Standard Type Suffix "H"	1600 3000			VDC
Isolation resistance	500VDC			1			G Ω
Isolation capacitance			Standard Type Suffix "H"			50 50	pF
Switching frequency	Full load to minimum load			100			kHz
Safety approvals	IEC/ EN/ UL62368-1					UL:E193009 CB:UL(Demko)	
Weight						4.5g (0.16oz)	
MTBF	MIL-HDBK-217F					6.263 x 10 ⁶ hrs	

ENVIRONMENTAL SPECIFICATIONS


Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	Without derating With derating	-40 +71		+71 +85	°C
Maximum case temperature				100	°C
Storage temperature range		-55		+125	°C
Thermal shock				MIL-STD-810F	
Vibration				MIL-STD-810F	
Relative humidity				5% to 95% RH	
Lead-free reflow solder process	Only for SMD type			IPC J-STD-020E	
Moisture sensitivity level(MSL)	Only for SMD type			IPC J-STD-033C Level 2a	

EMC SPECIFICATIONS


Parameter	Conditions	Level
EMI	EN55032	With external components Class A, Class B
EMS	EN55024	
ESD	EN61000-4-2	Air ± 8kV and Contact ± 6kV Perf. Criteria A
Radiated immunity	EN61000-4-3	10 V/m Perf. Criteria A
Fast transient	EN61000-4-4	± 2kV Perf. Criteria A
Surge	EN61000-4-5	With an external input filter capacitor (Nippon chemi-con KY series, 220µF/100V) ±1kV Perf. Criteria A
Conducted immunity	EN61000-4-6	10 Vr.m.s Perf. Criteria A
Power frequency magnetic field	EN61000-4-8	100A/m continuous; 1000A/m 1 second Perf. Criteria A

CAUTION: This power module is not internally fused. An input line fuse must always be used.


CHARACTERISTIC CURVE

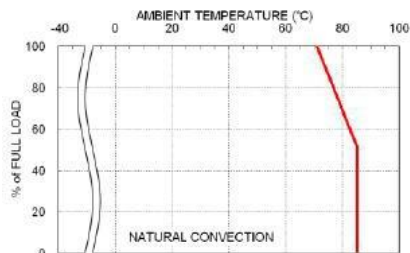

PDS03-48S05 Derating Curve

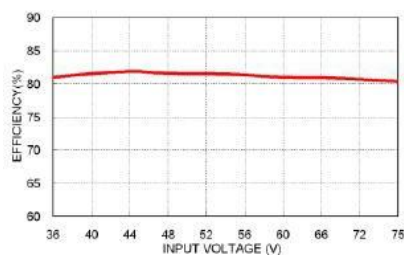

PDS03-48S05 Efficiency vs. Input Voltage

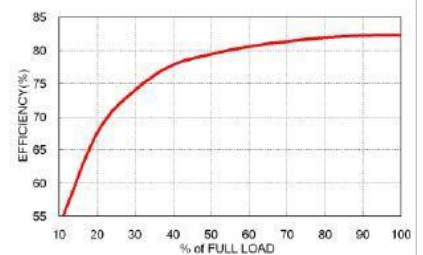

PDS03-48S05 Efficiency vs. Output Load

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.

To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.


The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
PDS(H)03-05S□□, PDS(H)03-05D□□	3	Slow-Blow
PDS(H)03-12S□□, PDS(H)03-12D□□	3	Slow-Blow
PDS(H)03-24S□□, PDS(H)03-24D□□	1.5	Slow-Blow
PDS(H)03-48S□□, PDS(H)03-48D□□	1.5	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

MECHANICAL DRAWING

PDS03

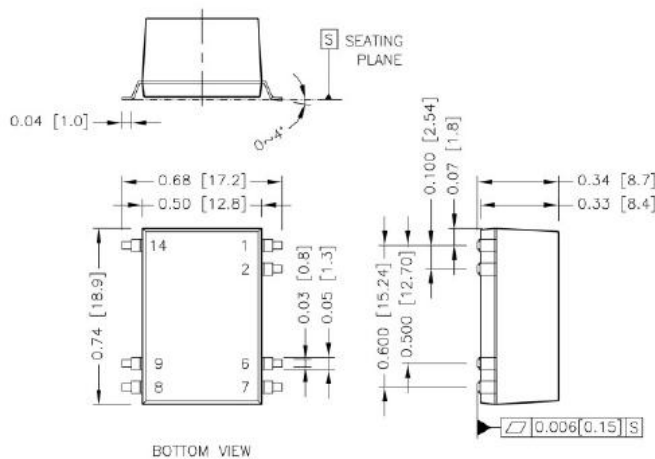


PIN CONNECTION

PIN	SINGLE	DUAL
1	-Vin	-Vin
2	Ctrl	Ctrl
6	NC	Common
7	NC	-Vout
8	+Vout	+Vout
9	-Vout	Common
14	+Vin	+Vin


1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Pin dimension tolerance ±0.004[0.10]

PDH03

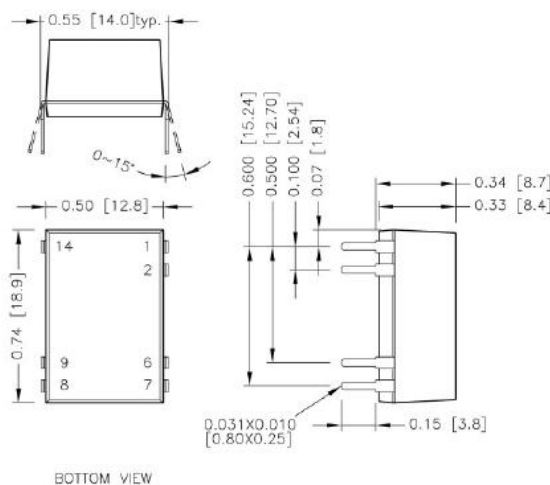


RECOMMENDED PAD LAYOUT

PDS03



All dimensions in inch[mm]
Pad size(lead free recommended)
Top view pad:0.080x0.070[2.00x1.80]

PDH03

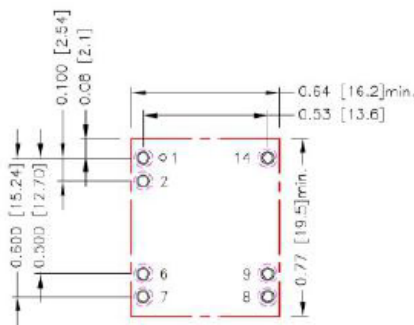


All dimensions in inch[mm]
Pad size(lead free recommended)
Through hole 1.2.6.7.8.9.14: $\Phi 0.043$ [1.10]
Top view pad 1.2.6.7.8.9.14: $\Phi 0.055$ [1.40]
Bottom view pad 1.2.6.7.8.9.14: $\Phi 0.080$ [2.04]


THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed "Maximum case temperature". When operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).

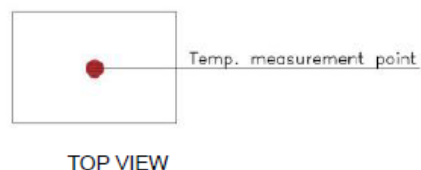

LEAD FREE REFLOW PROFILE For SMD Type

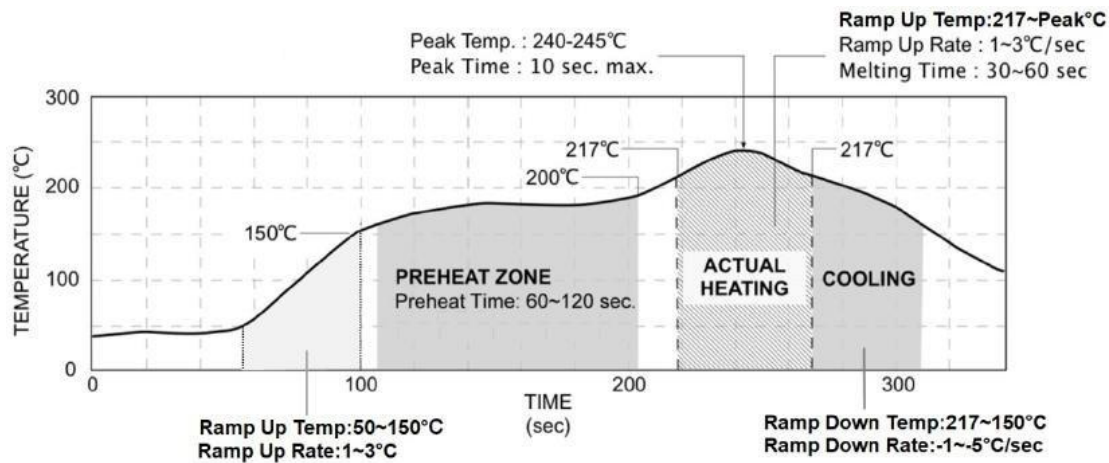

*The curves define the maximum peak reflow temperature permissible measured on pin1 or Vin pin.