



3
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT

+85°C
-40°C
AMBIENT TEMP.



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway

UL US CB CE UK CA



3000 VAC
Reinforced
Insulation

ADJ.
Output
Voltage

Internal
EN55032
Class **B**
Filter

LOW
Leakage
Current

LOW
Standby
Power

Operating
Altitude
5000
meter

Protection
Class I
Class II

OCP

OVP

SCP

OTP

OVCIII

PART NUMBER STRUCTURE

TAD180	U	S	12	A	-	M		
Series Name	Universal Input (VAC)	Output Quantity	Output Voltage (VDC)	Protection Type			Package Options	Application Options
	85-264	Single	12:12V 15:15V 18:18V 24:24V 28:28V 36:36V 48:48V 53:53V	A: CLASS I B: CLASS II			<input type="checkbox"/> : Open type E1 : Enclosed type D1 : Din rail type	<input type="checkbox"/> : AC Input C : OVC III (2000m) G : DC Input

TECHNICAL SPECIFICATION All specifications are typical at 230VAC input, full load and 25°C unless otherwise noted

Model Number	Input Range VAC	Output Voltage VDC	Output Current		Input Power @ No Load W	Efficiency %	Maximum Capacitor Load µF
			Natural Convection A	Forced Air Cooling With 10 CFM A			
TAD180US12A-M	85 ~ 264	12	12.5	15	0.15	92	10000
TAD180US15A-M	85 ~ 264	15	10	12	0.15	92	6800
TAD180US18A-M	85 ~ 264	18	8.34	10	0.15	92	4700
TAD180US24A-M	85 ~ 264	24	6.25	7.5	0.15	94	2700
TAD180US28A-M	85 ~ 264	28	5.36	6.43	0.15	93	1800
TAD180US36A-M	85 ~ 264	36	4.17	5	0.15	93	1200
TAD180US48A-M	85 ~ 264	48	3.13	3.75	0.15	93	680
TAD180US53A-M	85 ~ 264	53	2.83	3.40	0.15	93	560

INPUT SPECIFICATIONS						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
Operating input voltage range	AC input	85		264	VAC	
	DC input	120		370	VDC	
Input frequency	AC input	47		63	Hz	
Input current	100VAC and Full Load			3	A	
	240VAC and Full Load			1.5	A	
No load input power	230VAC		0.15		Watts	
Leakage current	264VAC			300	µA	
Power factor		0.95				
Start up time				1500	ms	
Rise time			15		ms	
Hold up time	115VAC and 150W	10			ms	
Input inrush current	230VAC			100	A	
Input protection	Internal fuse			T4.0A/250VAC		


OUTPUT SPECIFICATIONS						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
Output power	Forced air cooling with 10CFM			180	Watts	
	Natural convection			150	Watts	
Output peak power	Peak power			220	Watts	
	Peak power time		5		s	
	Peak power duty		20		%	
	Average operation power (% of Full Load)		55		%	
Initial set voltage accuracy	230VAC and Full Load	-1.0		+1.0	%	
Line regulation	Low Line to High Line at Full Load	-0.2		+0.2	%	
Load regulation	No Load to Full Load	-0.5		+0.5	%	
	10% Load to 90% Load	-0.4		+0.4	%	
Voltage adjustability		-8		+8	%	
Minimum load			0		%	
Ripple and noise	Measured by 20MHz bandwidth					
	With a 1µF/25V 1206 X7R MLCC		12Vout, 15Vout, 18Vout	120	mVp-p	
	With a 1µF/50V 1206 X7R MLCC		24Vout, 28Vout, 36Vout	120	mVp-p	
	With a 0.1µF/100V 1206 X7R MLCC		48Vout, 53Vout	250	mVp-p	
Temperature coefficient		-0.02		+0.02	%/°C	
Transient response	Load step from 100 ~ 75% change at 2.5A/µs	Peak deviation	3		% Vout	
		Recovery time	600		µs	
Over voltage protection	% of Vout(nom); Latch mode	115		135	%	
Over load protection	% of Iout rated; Hiccup mode		150		%	
Short circuit protection		Continuous, automatic recovery				

GENERAL SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute (Reinforced insulation)	Input to Output Input (Output) to F.G.	3000 2000			VAC
Isolation resistance	500VDC		0.1			GΩ
Switching frequency	230VAC, Full load			170		kHz
Safety approvals	IEC/ EN/ UL 62368-1				UL:E193009 CB:UL(Demko)	
Weight		Open type Enclosed type Din rail type			162g (5.70oz) 218g (7.70oz) 240g (8.47oz)	
MTBF	MIL-HDBK-217F Ta=25°C, Full load				1.145 x 10 ⁶ hrs	


ENVIRONMENTAL SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating		-40		+85	°C
Storage temperature range			-40		+85	°C
Over temperature protection	Internal thermistor; Hiccup mode			125		°C
Operating altitude					5000	m
Thermal shock					MIL-STD-810F	
Shock					IEC60068-2-27	
Vibration					IEC60068-2-6	
Relative humidity	Non-condensing				5% to 95% RH	

EMC SPECIFICATIONS						
Parameter	Conditions		Level			
EMI	EN55032 and FCC Part 15		Conducted	Class B		
			Radiated	Class A Class D		
Harmonic currents	EN61000-3-2	Full Load				
Voltage flicker	EN61000-3-3					
EMS	EN55024					
ESD	EN61000-4-2			Perf. Criteria A		
Radiated immunity	EN61000-4-3	20 V/m		Perf. Criteria A		
Fast transient	EN61000-4-4	± 2kV		Perf. Criteria A		
Surge	EN61000-4-5	DM ± 1kV and CM ± 2kV		Perf. Criteria A		
Conducted immunity	EN61000-4-6	20 Vr.m.s		Perf. Criteria A		
Power frequency magnetic field	EN61000-4-8	30A/m		Perf. Criteria A		
Dip and interruptions	EN61000-4-11					


CHARACTERISTIC CURVE

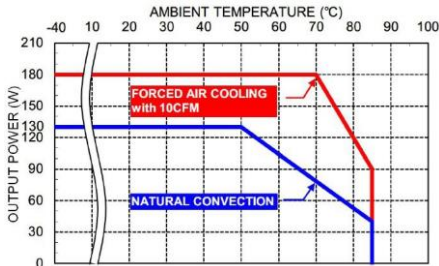


Derating Curve vs. Ambient Temperature
Vin=115VAC Open type

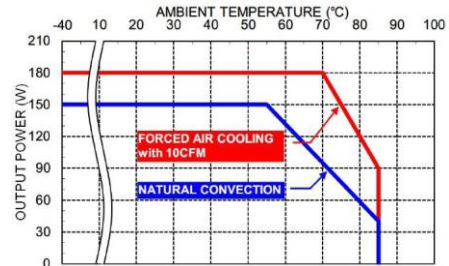


Derating Curve vs. Ambient Temperature
Vin=230VAC Open type

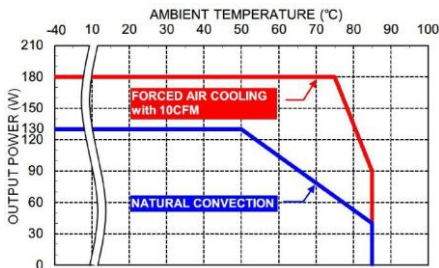


Derating Curve vs. Ambient Temperature
Vin=115VAC Enclosed type / Din rail type

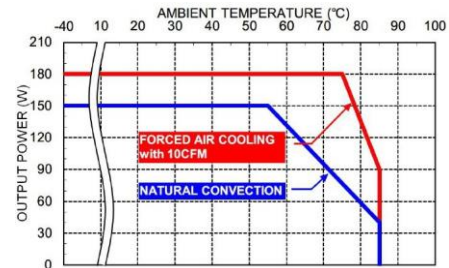


Derating Curve vs. Ambient Temperature
Vin=230VAC Enclosed type / Din rail type

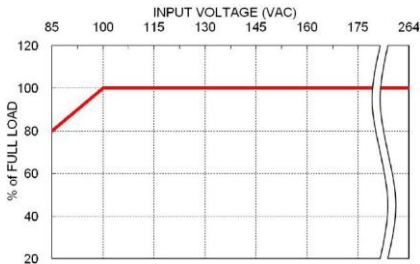

Derating Curve vs. Input Voltage
TAD180

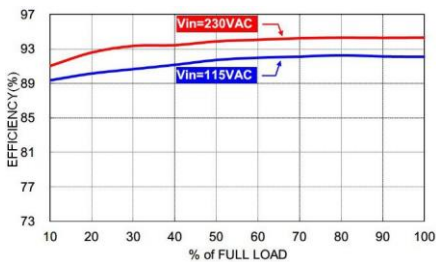


Efficiency vs. Output Load
TAD180US24 with Forced air cooling

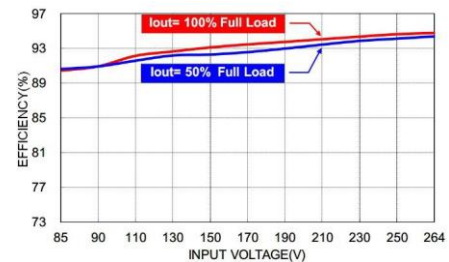

Efficiency vs. Input Voltage
TAD180US24 with Forced air cooling

MECHANICAL DRAWING


Open type- AC Input

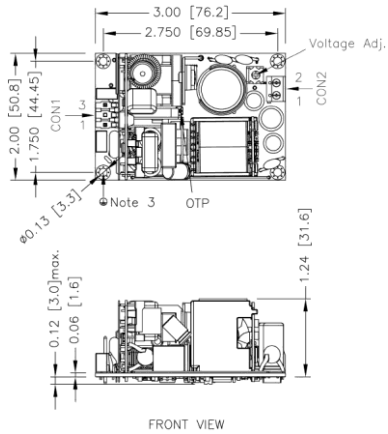

FRONT VIEW

1. All dimensions in inch [mm]
Tolerance : $x.xx \pm 0.02$ [$x.x \pm 0.5$]
 $x.xxx \pm 0.01$ [$x.xx \pm 0.25$]
2. The CON2 locked torque: MAX 2.5Kgf.cm/0.25N.m
3. The screws holes can be considered as PE connection for CLASS I application.

Open type -DC Input

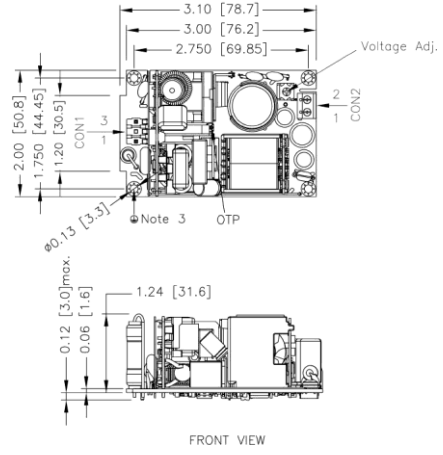


FRONT VIEW


1. All dimensions in inch [mm]
Tolerance : $x.xx \pm 0.02$ [$x.x \pm 0.5$]
 $x.xxx \pm 0.01$ [$x.xx \pm 0.25$]
2. The CON2 locked torque: MAX 2.5Kgf.cm/0.25N.m
3. The screws holes can be considered as PE connection for CLASS I application.

MECHANICAL DRAWING

Enclosed type

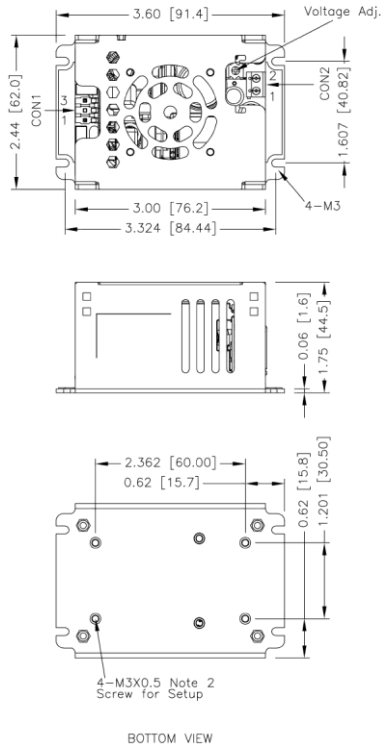

Din rail type

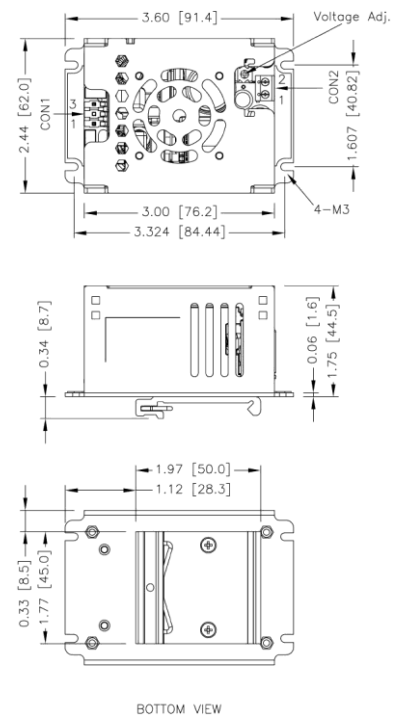

1. All dimensions in inch [mm]
Tolerance : x.xx±0.02 [x.x±0.5]
 x.xxx±0.01 [x.xx±0.25]
2. The screw locked torque: MAX 5Kgf.cm/0.49N.m
3. The CON2 locked torque: MAX 2.5Kgf.cm/0.25N.m

1. All dimensions in inch [mm]
Tolerance : x.xx±0.02 [x.x±0.5]
 x.xxx±0.01 [x.xx±0.25]
2. The CON2 locked torque: MAX 2.5Kgf.cm/0.25N.m

CONNECTOR CONNECTIONS

CONNECTORS CONNECTIONS

CON1 – Input Connector

Pin Number	AC Input	DC Input
Pin 3	Line	DC+
Pin 1	Neutral	DC-

Mates with
Molex housing : **09-50-8031**
Molex crimp terminals : **2478,6838,45570**

CON2 – Output Connector

Pin 1	+Vout
Pin 2	-Vout

Mates with
Screw locked torque MAX 2.5Kgf.cm/0.25N.m
Wire dimension range 24 ~ 14AWG