



Power Mate Technology, Inc

TAH450 Series

3 X 5 Inch AC-DC POWER SUPPLIES
Up to 450 Watts

3
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT

+85°C
-40°C
AMBIENT TEMP.



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway

UL US CB CE UK CA



3000
VAC
Reinforced
Insulation

ADJ.
Output
Voltage

Internal
EN55032
Class **B**

LOW
Leakage
Current

LOW
Standby
Power

Operating
Altitude
5000
meter

POWER
GOOD

Protection
Class I
Class II

REMOTE
**ON
OFF**

OCP

OTP

OVP

SCP

PART NUMBER STRUCTURE

T	A	H	450	U	S	12		-	F2	
Application	Package Code	Dimension Code	Output Power (W)	Input Voltage (VAC)	Output Quantity	Output Voltage (VDC)	Protection Type		Fan Options	Conformal Coating Options
Industry Application	A: Open type E: Enclosed type			U: Universal 85 ~ 264	S: Single	12:12 15:15 24:24 28:28 36:36 48:48 53:53	□: CLASS I B: CLASS II		□: Fan connector with fixed fan speed control Y: Fan connector with variable fan speed control For TEH450 only: Fixed fan speed F1: Fan 1, fan on the top F2: Fan 2, fan on the side Variable fan speed Y1: Fan 1, fan on the top Y2: Fan 2, fan on the side	□: None R: Conformal Coating

TECHNICAL SPECIFICATION All specifications are typical at 230VAC input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @ 230VAC				Input Power @No Load	Efficiency	Maximum Capacitor Load
			Natural Convection	Conduction Cooling	Forced Air Cooling				
					21 CFM External Fan	Internal Fan			
	VAC	VDC	A	A	A	A	W	%	μF
TAH450US12(-Y)	85 ~ 264	12	20.8	23.3	37.5	---	0.3	91	31250
TEH450US12(-Y)	85 ~ 264	12	20.8	23.3	37.5	---	0.3	91	31250
TEH450US12-F1(Y1)	85 ~ 264	12	---	---	---	37.5	0.4	91	31250
TEH450US12-F2(Y2)	85 ~ 264	12	---	---	---	37.5	0.4	91	31250
TAH450US15(-Y)	85 ~ 264	15	16.6	18.6	30.0	---	0.5	92	20000
TEH450US15(-Y)	85 ~ 264	15	16.6	18.6	30.0	---	0.5	92	20000
TEH450US15-F1(Y1)	85 ~ 264	15	---	---	---	30.0	0.8	92	20000
TEH450US15-F2(Y2)	85 ~ 264	15	---	---	---	30.0	0.8	92	20000
TAH450US24(-Y)	85 ~ 264	24	13.3	14.55	18.75	---	0.5	93	7820
TEH450US24(-Y)	85 ~ 264	24	13.3	14.55	18.75	---	0.5	93	7820
TEH450US24-F1(Y1)	85 ~ 264	24	---	---	---	18.75	0.8	93	7820
TEH450US24-F2(Y2)	85 ~ 264	24	---	---	---	18.75	0.8	93	7820
TAH450US28(-Y)	85 ~ 264	28	11.4	12.5	16.1	---	0.5	93	5750
TEH450US28(-Y)	85 ~ 264	28	11.4	12.5	16.1	---	0.5	93	5750
TEH450US28-F1(Y1)	85 ~ 264	28	---	---	---	16.1	0.8	93	5750
TEH450US28-F2(Y2)	85 ~ 264	28	---	---	---	16.1	0.8	93	5750
TAH450US36(-Y)	85 ~ 264	36	8.9	9.72	12.5	---	0.5	93	3500
TEH450US36(-Y)	85 ~ 264	36	8.9	9.72	12.5	---	0.5	93	3500
TEH450US36-F1(Y1)	85 ~ 264	36	---	---	---	12.5	0.8	93	3500
TEH450US36-F2(Y2)	85 ~ 264	36	---	---	---	12.5	0.8	93	3500
TAH450US48(-Y)	85 ~ 264	48	6.65	7.3	9.4	---	0.5	94	1960
TEH450US48(-Y)	85 ~ 264	48	6.65	7.3	9.4	---	0.5	94	1960
TEH450US48-F1(Y1)	85 ~ 264	48	---	---	---	9.4	0.8	94	1960
TEH450US48-F2(Y2)	85 ~ 264	48	---	---	---	9.4	0.8	94	1960
TAH450US53(-Y)	85 ~ 264	53	6.05	6.6	8.55	---	0.5	94	1600
TEH450US53(-Y)	85 ~ 264	53	6.05	6.6	8.55	---	0.5	94	1600
TEH450US53-F1(Y1)	85 ~ 264	53	---	---	---	8.55	0.8	94	1600
TEH450US53-F2(Y2)	85 ~ 264	53	---	---	---	8.55	0.8	94	1600

INPUT SPECIFICATIONS

Parameter	Conditions			Min.	Typ.	Max.	Unit
Operating input voltage range	AC input			85		264	VAC
	DC input			120		370	VDC
Input frequency	AC input			47		63	Hz
Input current	100VAC and Full Load 240VAC and Full Load					5.8 2.4	A
No load input power	230VAC	TAH(-Y), TEH(-Y)	12Vout		0.3	Watts	
			others		0.5		
			TEH -F□(Y□)	12Vout	0.5		
			others		0.8		
Leakage current	264VAC					300	μA
Power Factor				0.95			
Start up time						2000	ms
Rise time					30		ms
Hold up time	115VAC and Full Load				14		ms
Input inrush current	230VAC					100	A
Input protection	Internal fuse in line and neutral			T6.3A/250VAC			
Main output remote control	Positive Logic		Main power ON	Open or 3 ~ 12 VDC			
	Referenced to “-Control”		Main power OFF	Short or 0 ~ 1.2VDC			
	*Standby power always present		Input current of Control	-0.5		1	mA

OUTPUT SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output power	Forced air cooling Conduction cooling @ 230VAC Natural convection @ 230VAC *Please refer to the derating curve for detailed rating.	All 12Vout,15Vout others 12Vout,15Vout others		450 280 350 250 320	Watts
Initial set voltage accuracy	230VAC and Full Load	-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load	-0.2		+0.2	%
Load regulation	No Load to Full Load 10% Load to 90% Load	-0.5 -0.4		+0.5 +0.4	%
Voltage adjustability	Maximum output deviation is inclusive of remote sense	-8		+8	%
Minimum load			0		%
Ripple and noise	Measured by 20MHz bandwidth With a 1 μ F/25V 1206 X7R MLCC With a 1 μ F/50V 1206 X7R MLCC With a 0.1 μ F/100V 1206 X7R MLCC		250 300 240 280 360 480 530		mVp-p
Temperature coefficient		-0.02		+0.02	%/°C
Transient response	Load step from 50 ~ 75% change at 2.5A/ μ s		3 600		% Vout μ s
Over voltage protection	% of Vout(nom); Latch mode	110		135	%
Over load protection	% of maximum Iout rated; Hiccup mode	115		155	%
Short circuit protection	Protection level 1 (nominal) Protection level 2 (instantaneous high current)				Continuous, automatic recovery Latch
Standby power supply	Always present when AC supplied			5V / 2000mA	
Fan power supply	Fixed fan speed function			12V / 500mA	
Main output Power Good signal	Referenced to "GND"				Low Open collector

GENERAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute (Reinforced insulation)	3000 2000			VAC
Isolation resistance	500VDC	0.1			G Ω
Switching frequency	230VAC, Full load		75 65		kHz
Safety approvals	IEC/ EN/ UL 62368-1			UL:E193009 CB:UL(Demko)	
Weight	TAH(-Y) TEH(-Y) TEH -F1(Y1) TEH -F2(Y2)			462g(16.29oz) 504g(17.77oz) 524g(18.48oz) 552g(19.47oz)	
MTBF	MIL-HDBK-217F Ta=25°C, Full load			4.093 x 10 ⁵ hrs	


ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	With derating	-40 -40		+85 +80	°C
Storage temperature range		-40 -40		+85 +80	°C
Over temperature protection	Internal thermistor ; Latch mode	110		125	°C
Operating altitude	With derating			5000	m
Shock				IEC60068-2-27	
Vibration				IEC60068-2-6	
Relative humidity	Non-condensing			5% to 95% RH	


EMC SPECIFICATIONS

Parameter	Conditions		Level	
EMI	EN55032 and FCC Part 15	For optimum EMI performance, the power supply should be mounted to a metal plate grounded to all 4 mounting holes of the power supply. To comply with safety standards, this plate must be properly grounded to protective earth.	Conducted	Class B
			Radiated	Class A
Harmonic currents	EN61000-3-2	Full Load	Class A and D	
Voltage flicker	EN61000-3-3			
EMS	EN55024			
ESD	EN61000-4-2		Perf. Criteria A	
Radiated immunity	EN61000-4-3	3 V/m	Perf. Criteria A	
Fast transient	EN61000-4-4	$\pm 2\text{kV}$	Perf. Criteria A	
Surge	EN61000-4-5	$\text{DM} \pm 1\text{kV}$ and $\text{CM} \pm 2\text{kV}$	Perf. Criteria A	
Conducted immunity	EN61000-4-6	20 Vr.m.s	Perf. Criteria A	
Power frequency magnetic field	EN61000-4-8	30 A/m	Perf. Criteria A	
Dip and interruptions	EN61000-4-11			


CHARACTERISTIC CURVE

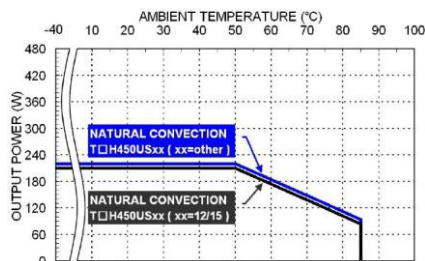


Derating Curve vs. Ambient Temperature
Vin=115VAC and Natural convection

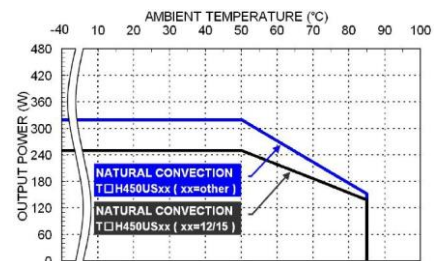


Derating Curve vs. Ambient Temperature
Vin=230VAC and Natural convection

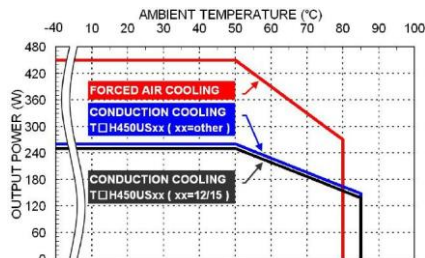


Derating Curve vs. Ambient Temperature
Vin=115VAC and Conduction cooling tested by 43x24.8x0.12cm plate
Forced air cooling with 21CFM (External Fan)

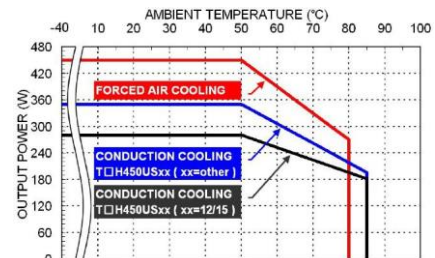

Derating Curve vs. Ambient Temperature
Vin=230VAC and Conduction cooling tested by 43x24.8x0.12cm plate
Forced air cooling with 21CFM (External Fan)

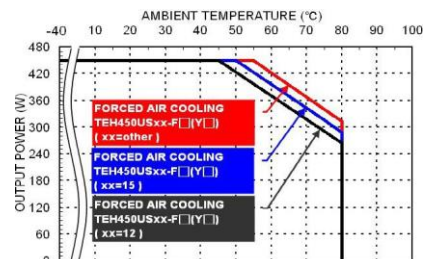


Derating Curve vs. Ambient Temperature
Vin=115VAC and Forced air cooling (Internal Fan)

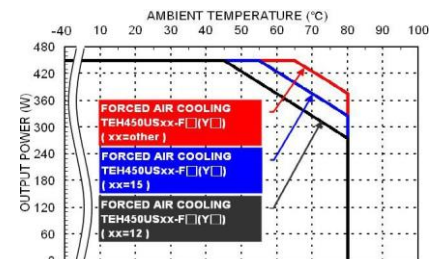


Derating Curve vs. Ambient Temperature
Vin=230VAC and Forced air cooling (Internal Fan)


CHARACTERISTIC CURVE (CONTINUED)

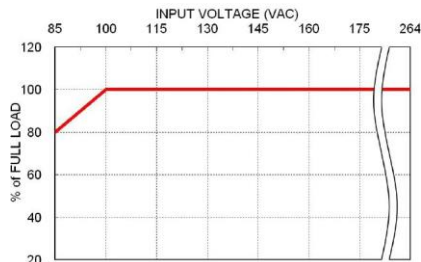

Derating Curve vs. Input Voltage
TAH450

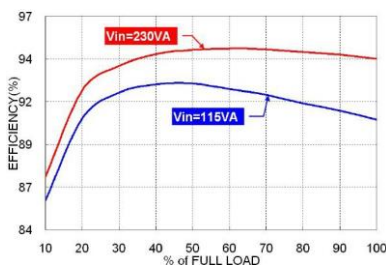

Efficiency vs. Output Load
TAH450US24 with Forced air cooling

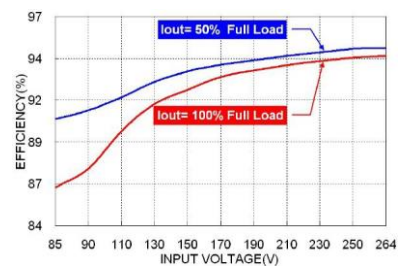

Efficiency vs. Input Voltage
TAH450US24 with Forced air cooling

OUTPUT SENSING

Output sensing function can be applied via connecting wires on CON3. Initially, Pin 7 and Pin 8 are shorted by a jumper set as default, shown as Fig. 1.






Fig. 1 Default connection

But if remote control function is to be used, the jumper on Pin 7 and Pin 8 should be removed. Since sense pins should not be left open for module stability, please follow the connections as below (Fig. 2).

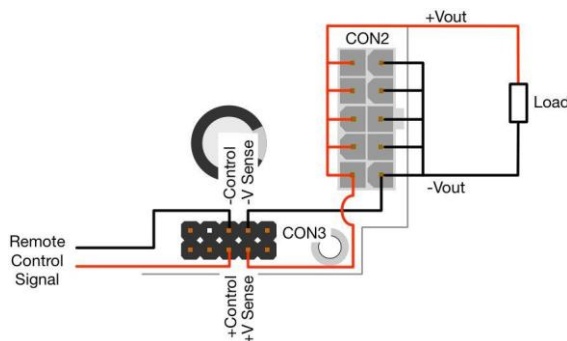

(a) Sense pins connect to corresponding polarity of Vout pin

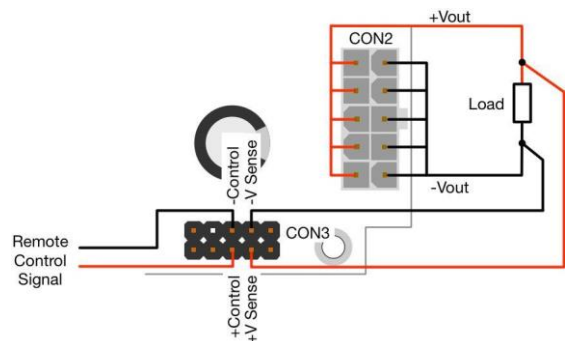


(b) Sense pins connect to corresponding polarity terminal of load.

Fig. 2 Recommended output sensing connections

MECHANICAL DRAWING

TAH450USXX (-Y)

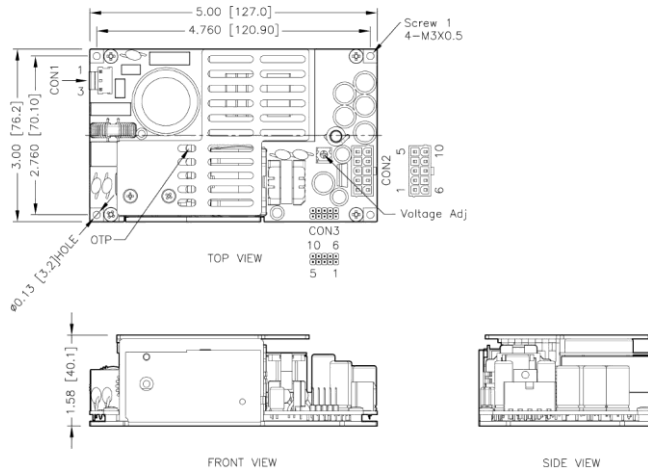

*Either one of four screw holes can be considered as PE connection for CLASS I application.

1. All dimensions in inch [mm]
2. Tolerance : x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Screw 1 locked torque : MAX 5.2Kgf-cm/0.51N.m

CONNECTORS CONNECTIONS

CON1 – Input Connector

Pin 1	Line
Pin 3	Neutral

Mates with
Molex housing : **09-50-8031**
Molex crimp terminals : **2478,6838,45570**

CON2 – Output Connector

Pin 1,2,3,4,5	+Vout
Pin 6,7,8,9,10	-Vout


Mates with
Molex housing : **39-01-2105**
Molex crimp terminals : **5556,45750**

CON3 – Aux Connector

Pin 1	+Fan	Pin 6	-Fan (GND)
Pin 2	+V Sense	Pin 7	-V Sense
Pin 3	+Control	Pin 8	-Control (GND)
Pin 4	+PG	Pin 9	No Pin
Pin 5	+Standby	Pin10	-Standby (GND)

Mates with
Molex housing : **90143-0008**
Molex crimp terminals : **90119**

TEH450USXX (-Y)

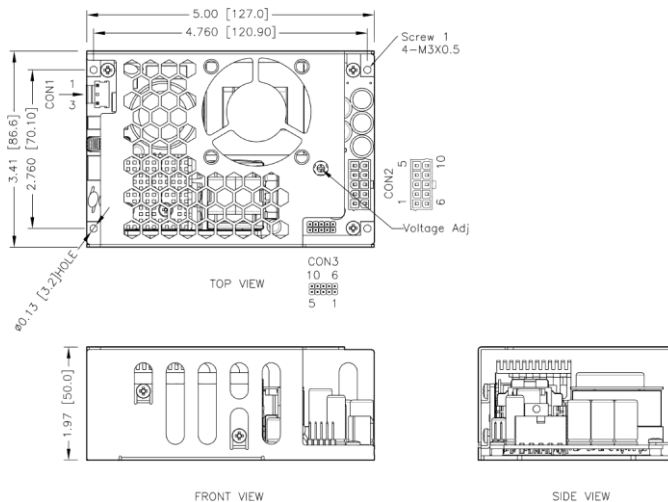

*Either one of four screw holes can be considered as PE connection for CLASS I application.

1. All dimensions in inch [mm]
2. Tolerance : x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Screw 1 locked torque : MAX 5.2Kgf-cm/0.51N.m

CONNECTORS CONNECTIONS

CON1 – Input Connector

Pin 1	Line
Pin 3	Neutral

Mates with
Molex housing : **09-50-8031**
Molex crimp terminals : **2478,6838,45570**

CON2 – Output Connector

Pin 1,2,3,4,5	+Vout
Pin 6,7,8,9,10	-Vout

Mates with
Molex housing : **39-01-2105**
Molex crimp terminals : **5556,45750**


CON3 – Aux Connector

Pin 1	+Fan	Pin 6	-Fan (GND)
Pin 2	+V Sense	Pin 7	-V Sense
Pin 3	+Control	Pin 8	-Control (GND)
Pin 4	+PG	Pin 9	No Pin
Pin 5	+Standby	Pin10	-Standby (GND)

Mates with
Molex housing : **90143-0008**
Molex crimp terminals : **90119**

MECHANICAL DRAWING (CONTINUED)

TEH450USXX-F1 (Y1) FAN dimension: 50x50x10mm Air flow: 11.4 CFM
The fan's life is shorter than power supply and has only 2 years warranty.

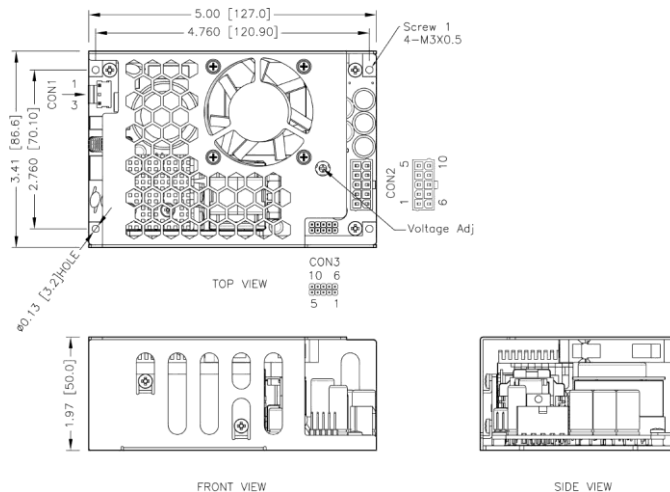

*Either one of four screw holes can be considered as PE connection for CLASS I application.

1. All dimensions in inch [mm]
2. Tolerance : x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Screw 1 locked torque : MAX 5.2Kgf-cm/0.51N.m

CONNECTORS CONNECTIONS

CON1 – Input Connector

Pin 1	Line
Pin 3	Neutral

Mates with
Molex housing : **09-50-8031**
Molex crimp terminals : **2478,6838,45570**

CON2 – Output Connector

Pin 1,2,3,4,5	+Vout
Pin 6,7,8,9,10	-Vout


Mates with
Molex housing : **39-01-2105**
Molex crimp terminals : **5556,45750**

CON3 – Aux Connector

Pin 1	+Fan	Pin 6	-Fan (GND)
Pin 2	+V Sense	Pin 7	-V Sense
Pin 3	+Control	Pin 8	-Control (GND)
Pin 4	+PG	Pin 9	No Pin
Pin 5	+Standby	Pin10	-Standby (GND)

Mates with
Molex housing : **90143-0008**
Molex crimp terminals : **90119**

TEH450USXX-F2 (Y2) FAN dimension: 40x40x10mm Air flow: 9.5 CFM
The fan's life is shorter than power supply and has only 2 years warranty.

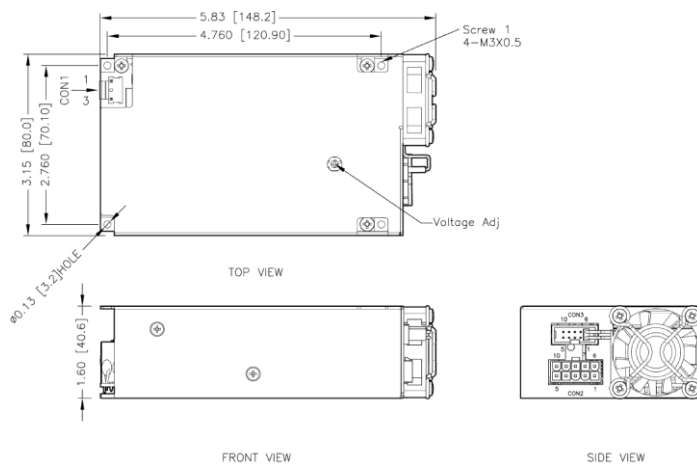

*Either one of four screw holes can be considered as PE connection for CLASS I application.

1. All dimensions in inch [mm]
2. Tolerance : x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Screw 1 locked torque : MAX 5.2Kgf-cm/0.51N.m

CONNECTORS CONNECTIONS

CON1 – Input Connector

Pin 1	Line
Pin 3	Neutral

Mates with
Molex housing : **09-50-8031**
Molex crimp terminals : **2478,6838,45570**

CON2 – Output Connector

Pin 1,2,3,4,5	-Vout
Pin 6,7,8,9,10	+Vout

Mates with
Molex housing : **39-01-2105**
Molex crimp terminals : **5556,45750**


CON3 – Aux Connector

Pin 1	+Fan	Pin 6	-Fan (GND)
Pin 2	+V Sense	Pin 7	-V Sense
Pin 3	+Control	Pin 8	-Control (GND)
Pin 4	+PG	Pin 9	No Pin
Pin 5	+Standby	Pin10	-Standby (GND)

Mates with
Molex housing : **90143-0008**
Molex crimp terminals : **90119**

OPTIONAL PARTS

7N-0265-F :

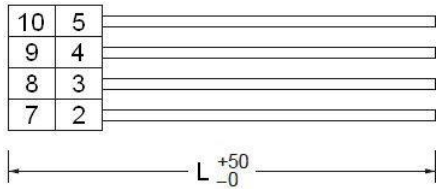


CON3 housing

Pin 2	+V Sense	gray	26AWG
Pin 3	+Control	orange	26AWG
Pin 4	+PG	blue	26AWG
Pin 5	+Standby	red	22AWG
Pin 7	-V Sense	green	26AWG
Pin 8	-Control (GND)	brown	26AWG
Pin 9	No wire	---	---
Pin10	-Standby (GND)	black	22AWG

Length (L) : 500mm typical

7N-0266-F :

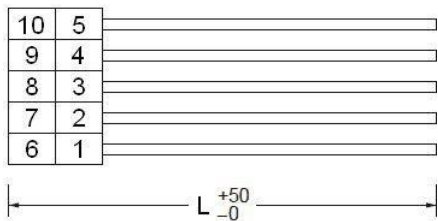

CON3 housing

Pin 1	+Fan	yellow	26AWG
Pin 2	+V Sense	gray	26AWG
Pin 3	+Control	orange	26AWG
Pin 4	+PG	blue	26AWG
Pin 5	+Standby	red	22AWG
Pin 6	-Fan (GND)	brown	26AWG
Pin 7	-V Sense	green	26AWG
Pin 8	-Control (GND)	brown	26AWG
Pin 9	No wire	---	---
Pin10	-Standby (GND)	black	22AWG

Length (L) : 500mm typical